


CHECKERS[®]

INDUSTRIAL SAFETY PRODUCTS

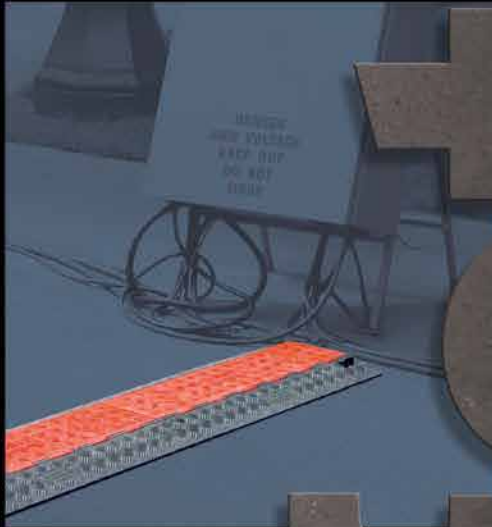

WE ARE

Safe

The experts in protecting people and assets



Checkers Industrial Safety Products is headquartered in Broomfield, Colorado, U.S.A. with another manufacturing and support facility located in Mesa, Arizona. Each of our products is proudly produced in the United States. We take pride in providing the highest quality product at the best possible price. Our products are sold worldwide into many diverse markets. Checkers is proud to serve you and we thank you for your business.



In 1987 Checkers Industrial Safety Products began with a simple vision: design and engineer the highest quality industrial safety products to provide effective safety solutions. That vision still drives Checkers today. With our product offerings of Cable/Hose Protection Systems, Wheel Chocks, Warning Whips, Warning and Safety Lights, and more, Checkers creates unique solutions for our customers. Having the opportunity to serve a diverse number of customers and markets for over 25 years has provided us the knowledge and insight to ensure every one of our customers' needs is satisfied. Through our commitment to innovation and excellence Checkers is poised to continue to serve as your leading global provider of industrial safety products.

MARKETS SERVED

- Mining
- Oil and Gas
- Military
- Entertainment
- Power Generation
- Construction
- Utilities
- Manufacturing
- Material Handling
- Industrial
- Ship Yards
- Aviation
- Government
- Traffic Safety
- Automotive
- Churches

CHECKERS IS A MEMBER OF AND PROUDLY SUPPORTS THE FOLLOWING ASSOCIATIONS:



LIMITED WARRANTY: Checkers guarantees the products it manufactures or sells against defects in workmanship and material for a period of one (1) year from the date of shipment or date of invoice, whichever is later. The product must be used, maintained and installed according to the instructions and procedures provided, or this warranty is void. Any alteration or modification of the product will also void this warranty. Checkers' OBLIGATION UNDER THIS WARRANTY IS LIMITED TO THE REPAIR OR REPLACEMENT OF DEFECTIVE PRODUCTS. No other warranty or remedy shall be provided. This warranty specifically does not guarantee or cover payment or reimbursement of any damages or consequential damages other than repair or replacement of the product.

Any claim under this warranty must be made in writing within twelve (12) months of the date of shipment or the date of invoice, whichever is later. Owner must prepay shipping costs of all products returned to Checkers under this warranty. If it is determined that the product is defective in material and /or workmanship the repair or replacement will occur, at Checkers' option, at no charge and return freight prepaid by Checkers. All other return of product to the owner shall be at the owner's expense.

CHECKERS AND ITS AUTHORIZED AGENTS, EMPLOYEES AND REPRESENTATIVES SPECIFICALLY AND EXPRESSLY DISCLAIM ANY AND ALL OTHER WARRANTIES, INCLUDING THE WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE AND/OR ANY WARRANTY OF MERCHANTABILITY, THAT MIGHT OTHERWISE BE APPLICABLE UNDER ANY STATE OR FEDERAL LAW.

LIMITED LIABILITY OF CHECKERS: Checkers and its authorized agents, distributors and representatives do not guarantee the performance of any Checkers product in the customer's use from anything other than defects in workmanship and material as provided for herein. Proper use by the customer is necessary for the effectiveness of the product, as well as the safety of those using same. The user is solely responsible to determine the suitability of any Checkers product for any intended use. The user assumes all risk and liability for use of any Checkers product. User specifically acknowledges receipt of proper instructions regarding the use of the product in the original packaging and disclaims any consequential damages to person or property, damages for loss of use, lost time, loss of profit, lost income, loss of the Checkers' product itself and/or other incidental or consequential damages other than as warranted by this limited warranty. User accepts the responsibility of removing from service any product that becomes worn out, unusable, unfit for intended use or defective in any way such as to make the product a potential safety hazard. Checkers is unable to undertake such obligations or responsibilities on behalf of the user as the user is in sole possession and control of the product.

VER: CHK 9/12

CABLE/HOSE PROTECTION SYSTEMS

featuring the world's most trusted brands

THE PERFECT SYSTEM

Our cable protectors feature a patented modular, interlocking design that can be customized to accommodate any number of cables. This innovative design makes setting up, dismantling, and storing the system simple.

Checkers offers the most extensive line of high performance cable/hose protection products in the world. These durable cable protection systems provide a method of safe passage for pedestrian traffic, vehicles and heavy duty equipment while protecting valuable electrical cables, cords and hose lines from damage.

To fit the needs of a wide variety of applications, we offer lidded models, drop over models, open top models, and low profile models constructed from all-weather polyurethane. We also offer rubber duct models for light applications.

CHECKERS MANUFACTURES THE FIVE MOST POPULAR BRANDS IN THE WORLD:



LINEBACKER® HEAVY DUTY with T-Connectors

- Checkers' most robust cable protection option
- High load bearing capacity for heavy duty equipment applications
- Ideal for: Oil and Gas, Mining, Military, Construction and any heavy duty application



T-Connector



YELLOW JACKET® HEAVY DUTY with Dog Bone Connectors

- Introduced over 30 years ago, the "original" cable protector
- Recommended for applications with heavy volume vehicle traffic
- Ideal for: Entertainment, Manufacturing, Material Handling



Dog Bone Connector



GUARD DOG® GENERAL PURPOSE with Dog Bone Connectors

- Checkers' most versatile cable protection option
- Solid construction for pedestrian traffic and over-the-road vehicles
- Ideal for: Utility, Industrial, Entertainment



Dog Bone Connector



FASTLANE® LIGHTWEIGHT with L-Connectors

- Fast drop-over installation
- Compact, low profile design
- Ideal for: Offices, Warehouses, Commercial, Industrial



L-Connector



DIAMONDBACK® HEAVY DUTY HOSE BRIDGES

- Protect cables and hose lines up to 6 inches in diameter
- Modular interlocking design can be customized to fit any need
- Ideal for: Refineries, Mining, Industrial, Firefighting Vehicles

ADVANTAGES OF USING CABLE PROTECTION SYSTEMS BY CHECKERS

- Largest manufacturer of cable protectors in the world
- We manufacture the five most popular brands of cable/hose protectors in the industry
- Checkers cable protection systems are manufactured in the USA in Broomfield, Colorado
- Our patented design and connector systems are the best in the industry
- We offer extensive accessories, such as ADA/DDA compliant access ramps, protector bridges, 45° & 90° turns, and end caps
- Polyurethane construction is lighter and more durable than rubber imitations in extreme weather conditions
- Universal safety colors alerting all types of traffic to the product's presence
- Satisfies all state and federal regulatory agencies
- Only manufacturer in the world offering customized solutions, including logos molded into the product
- Multiple channel options so each cable and hose can have its own dedicated channel
- Modular interlocking design that makes setting up, dismantling and storing the product simple and straightforward
- Non-conductive material insulates and protects cords/cable, as well as people

CHOOSING THE RIGHT MODEL

CHANNEL SIZE

5, 4, 3, 2, and 1-channel models. Make sure your cable/hose will fit into your desired cable protector based on channel width/height.

LOAD CAPACITY

Determine the required load capacity for your application. Know what type of vehicles and pedestrian traffic will be crossing over your cable protectors.

HEIGHT/SLOPE

Cable protector height varies. Understand clearance your vehicles require: low profile models, ADA compliant ramps and unique accessories available if needed.

CONNECTOR STYLE

"Dog Bone" and "T" connectors available. Make sure your product will be compatible with previous style cable protectors you may already own.

GENERAL RULE

As the number of channels on the protector decreases, channel height increases (Does not apply to low profile and drop over models).

Advantages of Polyurethane Cable/Hose Protectors versus Rubber Cable Protectors

- Up to 33% lighter, easier to handle and less costly to ship
- Withstands repetitive impact & abuse over longer periods of time
- Manufactured in the USA and meets all regulatory requirements
- Superior load bearing capacity
- Better oil, chemical, fuel & lubricant resistance
- Higher cut & tear resistance
- Higher abrasion resistance
- UV Stable
- Doesn't smell like some imported rubber products
- Broader hardness range

SPECIFICATION DATA FOR POLYURETHANE MODELS

MATERIAL	Polyurethane (UV stabilized)
OPERATING TEMP	-40°F to 120°F (-40°C to 48°C)
HINGE PIN MATERIAL*	Reinforced fiberglass
SAFETY SYMBOLS*	Per ANSI. Z535.3-1991

* where applicable

NEC REQUIREMENTS

Protects valuable electrical cables and permits compliance with 2011 National Electrical Code requirements (Article 525) for minimizing the tripping hazard of electrical cables and cords at carnivals, fairs, amusement parks and similar events.




Safety Warning Symbols
molded into protectors
(where applicable)



ADA/DA
Compliant
Accessories

CUSTOMIZE YOUR CABLE PROTECTORS

Because we do our own manufacturing, Checkers has the ability to customize your cable protectors in a variety of ways. We can create a customized color, or we can mold your company's logo into the lid, or both. Checkers has the capabilities to create these customized options with a reasonable turnaround time and at a reasonable price.

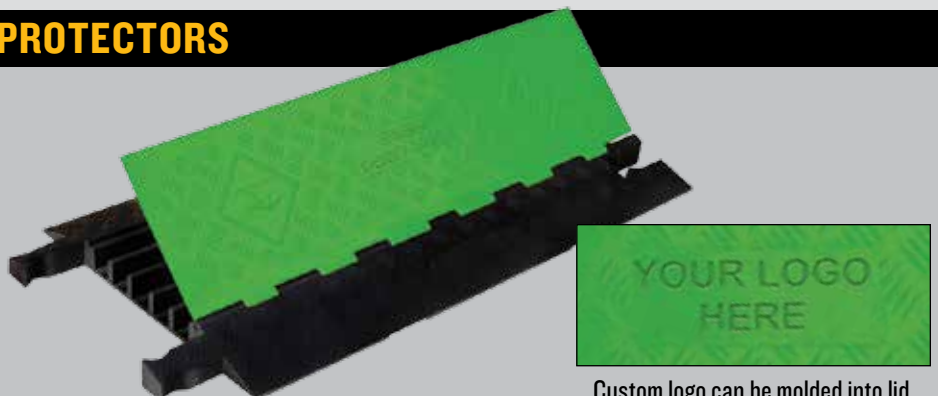

Custom logo can be molded into lid

CHECKERS®

INDUSTRIAL SAFETY PRODUCTS

CABLE AND HOSE PROTECTORS IN ACTION

THE WORD IS OUT

"Linebacker® Cable Protectors have greatly improved the safety and accessibility of our carnival midway and are one of the greatest improvements to hit our midway in years."

- Gehrie Aten, President, Bill Hames Shows, Inc.



FastLane Drop Overs in use at a festival



Linebackers in use on a construction site



Guard Dogs in use at a convention center



Guard Dogs in use with a power distribution box







Yellow Jackets in use at a community event



Diamondback Hose Bridges in use at a fire training facility

CABLE PROTECTOR REFERENCE GUIDE

 T-Connector	Linebacker Heavy Duty 5-Channel
	Linebacker Heavy Duty 4-Channel
	Linebacker Heavy Duty 3-Channel
	Linebacker Heavy Duty 2-Channel
	Linebacker General Manufacturing 4-Channel
 "Dog Bone" Connector	Linebacker General Purpose 5-Channel
	Linebacker Heavy Duty Drop Over/Split Top 1.25" Height
	Linebacker Heavy Duty Drop Over/Split Top 2.25" Height
	Yellow Jacket Heavy Duty 5-Channel
	Yellow Jacket Heavy Duty 4-Channel
 "Dog Bone" Connector	Yellow Jacket Heavy Duty 3-Channel
	Yellow Jacket Heavy Duty 2-Channel
	Yellow Jacket Heavy Duty 1-Channel 5" Height
	Yellow Jacket Heavy Duty 1-Channel 3" Height
	Guard Dog General Purpose 5-Channel
 L-Connector	Guard Dog 5-Channel General Purpose ADAGuard Dog
	General Purpose 3-Channel
	Guard Dog General Purpose Drop Over 3-Channel
	Guard Dog Low Profile 5-Channel
	Guard Dog Low Profile 5-Channel w/ ADA Ramps
 "Dog Bone" Connector	Guard Dog Low Profile 3-Channel
	Guard Dog Low Profile 3-Channel w/ ADA Ramps
	Guard Dog Low Profile 2-Channel
	Guard Dog Low Profile 2-Channel w/ ADA Ramps
	Guard Dog Low Profile 1-Channel
 L-Connector	Guard Dog Low Profile 1-Channel w/ ADA Ramps
	FastLane Lightweight 1-Channel Drop Over
	FastLane Lightweight 2-Channel Drop Over
 L-Connector	FastLane Lightweight 1-Channel Drop Over

MODEL NO.	CHANNEL HEIGHT	LOAD CAPACITY (PER AXLE)	# OF CHANNELS	PAGE
CP5X125	1.35 in. (3.43 cm)	40,300 lb. (18,280 kg)	5	6
CP4X125	1.35 in. (3.43 cm)	40,300 lb. (18,280 kg)	4	8
CP3X225	2.25 in. (5.72 cm)	28,420 lb. (12,892 kg)	3	10
CP2X325	3.25 in. (8.27 cm)	21,760 lb. (9,870 kg)	2	12
CP4X300	3 in. (7.62 cm)	20,200 lb. (9,163 kg)	4	13
CP5X125-GP	1.3 in. (3.3 cm)	21,000 lb. (9,526 kg)	5	14
CP1X125	1.25 in. (3.18 cm)	23,400 lb. (10,614 kg)	1	16
CP1X225	2.25 in. (5.72 cm)	17,000 lb. (7,712 kg)	1	16
YJ5-125	1 in. (2.54 cm)	32,600 lb. (14,787 kg)	5	18
YJ4-125	1.25 in. (3.18 cm)	32,600 lb. (14,787 kg)	4	20
YJ3-225	2.125 in. (5.4 cm)	28,420 lb. (12,892 kg)	3	22
YJ2-400	3.75 in. (9.53 cm)	15,980 lb. (7,248 kg)	2	24
YJ1-500	5 in. (12.7 cm)	18,780 lb. (8,518 kg)	1	25
YJ1-300	3 in. (7.62 cm)	15,980 lb. (7,248 kg)	1	25
GD5X125	1.325 in. (3.37 cm)	21,000 lb. (9,526 kg)	5	28
GD5X125-ADA	1.325 in. (3.37cm)	21,000 lb. (9,526 kg)	5	30
GD3X225	2.25 in. (5.8 cm)	28,420 lb. (12,892 kg)	3	31
GD3-DO	1.325 in. (3.37 cm)	21,000 lb. (9,526 kg)	3	34
GD5X75-ST	0.75 in. (1.9 cm)	48,000 lb. (21,772 kg)	5	32
GD5X75	0.75 in. (1.9 cm)	68,000 lb. (30,844 kg)	5	32
GD3X75-ST	0.75 in. (1.9 cm)	34,000 lb. (15,422 kg)	3	32
GD3X75	0.75 in. (1.9 cm)	54,000 lb. (24,492 kg)	3	32
GD2X75-ST	0.75 in. (1.9 cm)	26,000 lb. (11,792 kg)	2	33
GD2X75	0.75 in. (1.9 cm)	46,000 lb. (20,864 kg)	2	33
GD1X75-ST	0.75 in. (1.9 cm)	26,000 lb. (11,792 kg)	1	33
GD1X75	0.75 in. (1.9 cm)	46,000 lb. (20,864 kg)	1	33
FL1X4	1 in. (2.54 cm)	2,100 lb. (954 kg)	1	37
FL2X1.75	1 in. (2.54 cm)	2,100 lb. (954 kg)	2	37
FL1X1.5	0.50 in. (1.27 cm)	2,100 lb. (954 kg)	1	37





5-CHANNEL HEAVY DUTY

System features patented T-Connectors


FEATURES

- Protects cables and hoses up to 1.35" outside dia.
- Patented T-Connectors to extend to any length
- Reinforced hinged lid for easy cable placement
- All-weather polyurethane construction
- Patented 5-bar tread surface for maximum traction
- Easy to transport, setup, disassemble, and store




T-Connector

MODEL: CP5X125

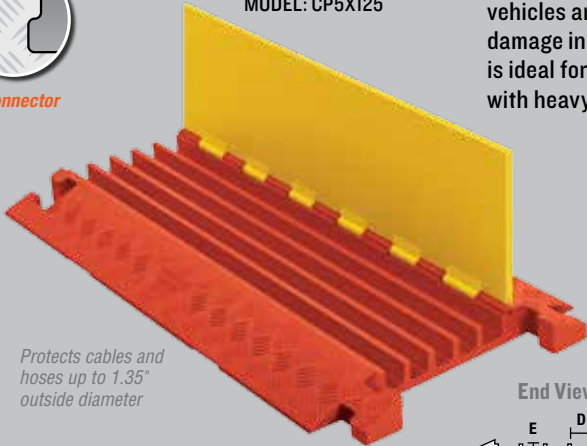

Protects cables and hoses up to 1.35" outside diameter



Lid/Base Color Options




Yellow/Orange = Y/O

LOAD CAPACITY

Max load tested at 70°F (21°C)

20,150 lb./Tire (9,140 kg)



40,300 lb./Axle (18,280 kg)




MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
CP5X125	36 in. (91.4 cm)	20 in. (50.8 cm)	2.31 in. (5.72 cm)	1.35 in. (3.43 cm)	1.35 in. (3.43 cm)	25 lb. (11.3 kg)

ACCESSORIES for Linebacker 5-Channel Heavy Duty Cable Protectors

45° LEFT TURN MODEL: CPT5X125-L





45° RIGHT TURN MODEL: CPT5X125-R




Turns Color: Y/O = Yellow Lid with Orange Ramps

END CAPS (Pair Only) MODEL: CPEC5X125



End Caps Color: O = Orange

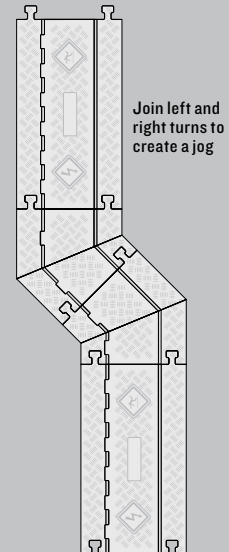

Join left and right turns to create a jog


	MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
45° LEFT TURN	CPT5X125-L	25 in. (63.5 cm)	20 in. (50.8 cm)	2.31 in. (5.72 cm)	1.35 in. (3.43 cm)	1.35 in. (3.43 cm)	13 lb. (5.9 kg)
45° RIGHT TURN	CPT5X125-R	25 in. (63.5 cm)	20 in. (50.8 cm)	2.31 in. (5.72 cm)	1.35 in. (3.43 cm)	1.35 in. (3.43 cm)	13 lb. (5.9 kg)
END CAPS (PAIR)	CPEC5X125	Female: 7.5 in. (19 cm)	20 in. (50.8 cm)	2.31 in. (5.72 cm)	1.35 in. (3.43 cm)	1.35 in. (3.43 cm)	3.5 lb. (1.6 kg)
		Male: 5.25 in. (13.3 cm)	20 in. (50.8 cm)	2.31 in. (5.72 cm)	1.35 in. (3.43 cm)	1.35 in. (3.43 cm)	3.5 lb. (1.6 kg)

ACCESSIBILITY RAMPS AND RAILS for Linebacker 5-Channel Heavy Duty Cable Protectors

CHECKERS 5-CHANNEL ACCESSIBILITY RAMPS AND RAILS feature a gradual slope and slip-resistant surface to ensure a safe crossing point for carts, forklifts, vehicles with small wheels and heavy trucks. In addition, each Checkers' ramp and rail system is manufactured to meet ADA and DDA compliant specifications.



ADA/DDA
Compliant

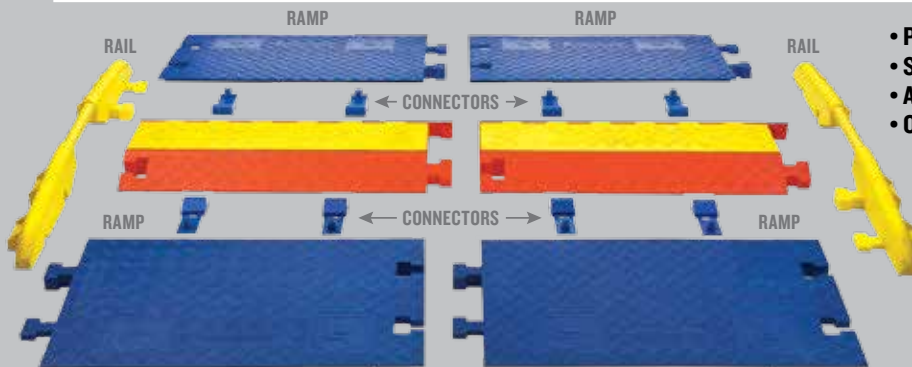

- Patented, modular ADA/DDA Compliant ramps
- Still allows access to cables and cords
- Add ramps and rails when requirements specify
- One person installation - no tools required

LOAD CAPACITY


Max load tested at 70°F (21°C)

20,150 lb./Tire (9,140 kg)
40,300 lb./Axle (18,280 kg)


System shown with 2 Heavy Duty Linebackers, 2 Pairs of Ramps and 8 Connectors.
Ramps available only in blue and rails available only in yellow.



RAMPS - CPRP-4/5

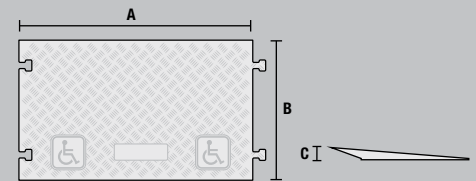

RAILS - CPRL-4/5



	MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	WEIGHT	COLOR
RAMPS	CPRP-4/5	36 in. (91.44 cm) (SINGLE)	21.88 in. (55.58 cm) (SINGLE)	2 in. (5.08 cm)	40 lb. (18.1 kg) (PAIR OF RAMPS)	Blue
RAIL	CPRL-4/5	1.5 in. (3.81 cm)	55.5 in. (140.97 cm)	2 in. (5.08 cm)	12.75 lb. (5.8 kg)	Yellow

PROTECTOR BRIDGES for Linebacker 5-Channel Heavy Duty Cable Protectors


CHECKERS 2-CHANNEL CABLE BRIDGES provide additional cable channels while creating a continuous, level, crossing surface for vehicle and pedestrian traffic. These modular accessories allow users to create any number of runs simultaneously by utilizing the space between multiple parallel cable protector runs.

- Patented Protector Bridges


LOAD CAPACITY

Max load tested at 70°F (21°C)

20,150 lb./Tire (9,140 kg)
40,300 lb./Axle (18,280 kg)

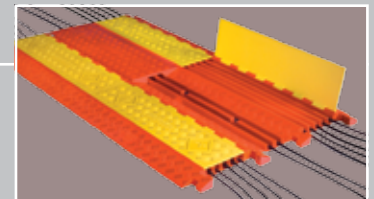


BRIDGE - CL2X150-4/5

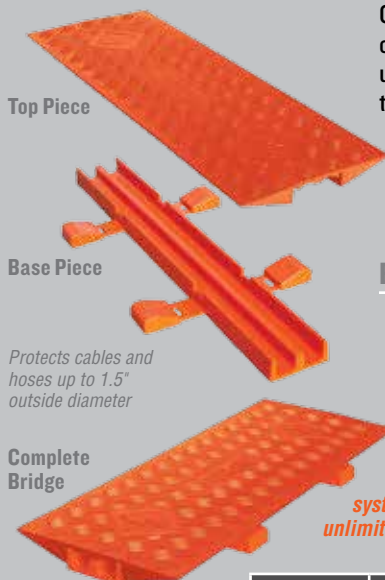

Protects cables and hoses up to 1.5" outside diameter

The first expandable system to accommodate an unlimited number of channels!

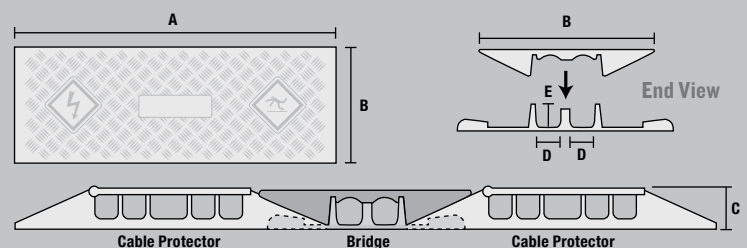

	MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT	COLOR
	CL2X150-4/5	36 in. (91.44 cm)	14 in. (35.56 cm)	2.125 in. (5.3 cm)	1.5 in. (3.81 cm)	1.5 in. (3.81 cm)	18 lb. (8.2 kg)	Orange



4-CHANNEL HEAVY DUTY

System features patented T-Connectors


FEATURES

- Protects cables and hoses up to 1.35" outside dia.
- Patented T-Connectors to extend to any length
- Reinforced hinged lid for easy cable placement
- All-weather polyurethane construction
- Patented 5-bar tread surface for maximum traction
- Easy to transport, setup, disassemble, and store




T-Connector

MODEL: CP4X125

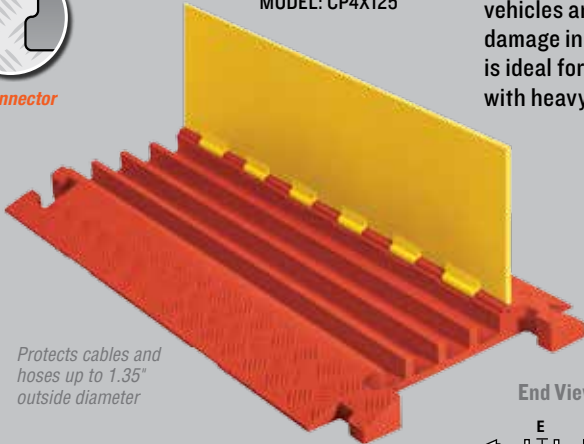

Protects cables and hoses up to 1.35" outside diameter



Lid/Base Color Options




Yellow/Orange = Y/O

LOAD CAPACITY

Max load tested at 70°F (21°C)

20,150 lb./Tire (9,140 kg)

40,300 lb./Axle (18,280 kg)




*NOTE: One of the channels is 1.54 in. wide (3.92 cm)


MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
CP4X125	36 in. (91.4 cm)	20 in. (50.8 cm)	2.31 in. (5.72 cm)	1.85 in. (4.71 cm)	1.35 in. (3.43 cm)	26 lb. (11.8 kg)

ACCESSORIES for Linebacker 4-Channel Heavy Duty Cable Protectors

45° LEFT TURN MODEL: CPT4X125-L





45° RIGHT TURN MODEL: CPT4X125-R




Turns Color: Y/O = Yellow Lid with Orange Ramps

END CAPS (Pair Only) MODEL: CPEC4X125



*Note: One of the channels is 1.54 in. wide (3.92 cm)

End Caps Color: O = Orange

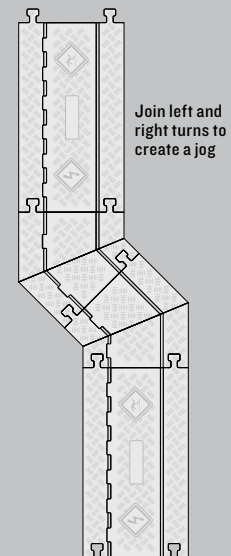

Join left and right turns to create a jog

45° LEFT TURN

45° RIGHT TURN

END CAPS (PAIR)


MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH*	E: CHANNEL HEIGHT	WEIGHT
CPT4X125-L	25 in. (63.5 cm)	20 in. (50.8 cm)	2.31 in. (5.72 cm)	1.85 in. (4.71 cm)	1.35 in. (3.43 cm)	13 lb. (5.9 kg)
CPT4X125-R	25 in. (63.5 cm)	20 in. (50.8 cm)	2.31 in. (5.72 cm)	1.85 in. (4.71 cm)	1.35 in. (3.43 cm)	13 lb. (5.9 kg)
CPEC4X125	Female: 7.5 in. (19 cm)	20 in. (50.8 cm)	2.31 in. (5.72 cm)	1.85 in. (4.71 cm)	1.35 in. (3.43 cm)	3.5 lb. (1.6 kg)
	Male: 5.25 in. (13.3 cm)	20 in. (50.8 cm)	2.31 in. (5.72 cm)	1.85 in. (4.71 cm)	1.35 in. (3.43 cm)	3.5 lb. (1.6 kg)

ACCESSIBILITY RAMPS AND RAILS for Linebacker 4-Channel Heavy Duty Cable Protectors

CHECKERS 4-CHANNEL ACCESSIBILITY RAMPS AND RAILS feature a gradual slope and slip-resistant surface to ensure a safe crossing point for carts, forklifts, vehicles with small wheels and heavy trucks. In addition, each Checkers' ramp and rail system is manufactured to meet ADA and DDA compliant specifications.



ADA/DDA
Compliant

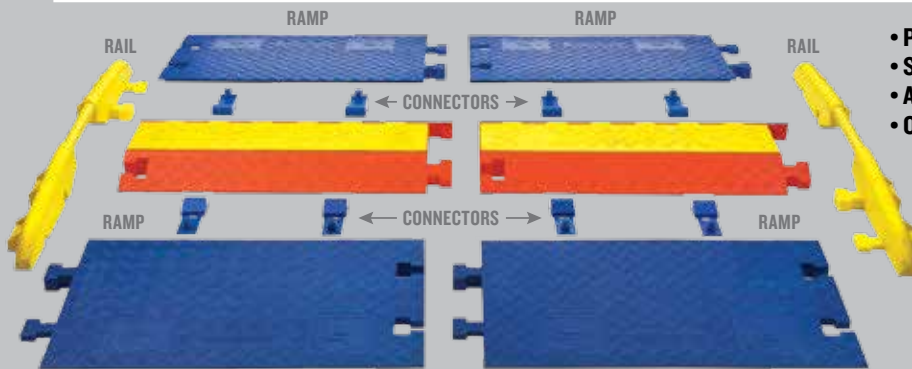

- Patented, modular ADA/DDA Compliant ramps
- Still allows access to cables and cords
- Add ramps and rails when requirements specify
- One person installation - no tools required

LOAD CAPACITY


Max load tested at 70°F (21°C)

20,150 lb./Tire (9,140 kg)
40,300 lb./Axle (18,280 kg)


System shown with 2 Heavy Duty Linebackers, 2 Pairs of Ramps and 8 Connectors.
Ramps available only in blue and rails available only in yellow.



RAMPS - CPRP-4/5

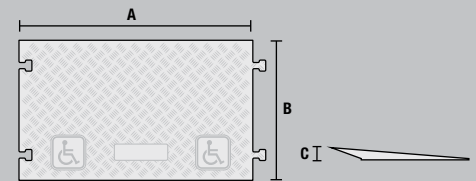

RAILS - CPRL-4/5



	MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	WEIGHT	COLOR
RAMPS	CPRP-4/5	36 in. (91.44 cm) (SINGLE)	21.88 in. (55.58 cm) (SINGLE)	2 in. (5.08 cm)	40 lb. (18.1 kg) (PAIR OF RAMPS)	Blue
RAIL	CPRL-4/5	1.5 in. (3.18 cm)	55.5 in. (140.97 cm)	2 in. (5.08 cm)	12.75 lb. (5.8 kg)	Yellow

PROTECTOR BRIDGES for Linebacker 4-Channel Heavy Duty Cable Protectors


CHECKERS 2-CHANNEL CABLE BRIDGES provide additional cable channels while creating a continuous, level, crossing surface for vehicle and pedestrian traffic. These modular accessories allow users to create any number of runs simultaneously by utilizing the space between multiple parallel cable protector runs.

- Patented Protector Bridges

LOAD CAPACITY

Max load tested at 70°F (21°C)

20,150 lb./Tire (9,140 kg)
40,300 lb./Axle (18,280 kg)

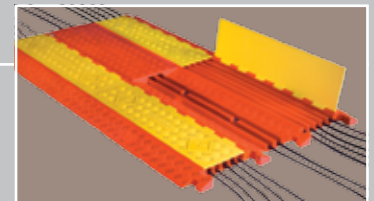

Top Piece


Base Piece

Protects cables and hoses up to 1.5" outside diameter

Complete Bridge

The first expandable system to accommodate an unlimited number of channels!

BRIDGE - CL2X150-4/5

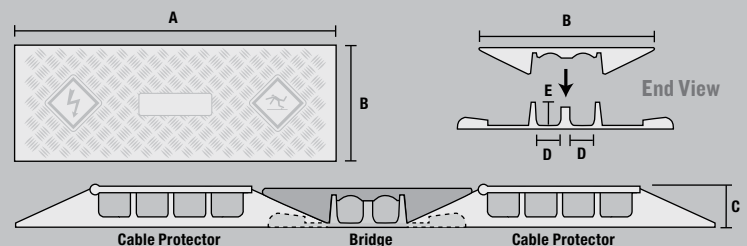

	MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT	COLOR
	CL2X150-4/5	36 in. (91.44 cm)	14 in. (35.56 cm)	2.125 in. (5.3 cm)	1.5 in. (3.81 cm)	1.5 in. (3.81 cm)	18 lb. (8.2 kg)	Orange



3-CHANNEL HEAVY DUTY

System features patented T-Connectors


FEATURES

- Protects cables and hoses up to 2.25" outside dia.
- Patented T-Connectors to extend to any length
- Reinforced hinged lid for easy cable placement
- All-weather polyurethane construction
- Patented 5-bar tread surface for maximum traction
- Easy to transport, setup, disassemble, and store



T-Connector

MODEL: CP3X225

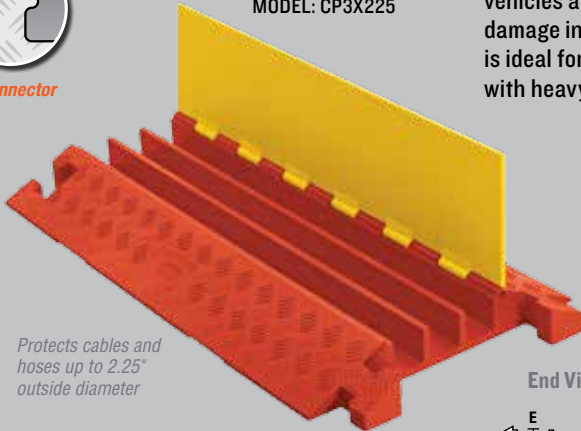

Protects cables and hoses up to 2.25" outside diameter

LINEBACKER® 3-CHANNEL CABLE PROTECTOR with hinged lid provides a safe crossing for vehicles and pedestrian traffic while protecting valuable electrical cables and hose lines from damage in extreme weather conditions and work environments. Modular interlocking design is ideal for use in oil and gas applications, mining, military, and other industrial environments with heavy trucks and forklifts.

Lid/Base Color Options





Yellow/Orange = Y/O

LOAD CAPACITY

Max load tested at 70°F (21°C)

14,210 lb./Tire (6,446 kg)


28,420 lb./Axle (12,892 kg)




MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
CP3X225	36 in. (91.4 cm)	20 in. (50.8 cm)	3.05 in. (7.75 cm)	2.25 in. (5.72 cm)	2.25 in. (5.72 cm)	28 lb. (12.7 kg)

ACCESSORIES for Linebacker 3-Channel Heavy Duty Cable Protectors

45° LEFT TURN MODEL: CPT3X225-L





45° RIGHT TURN MODEL: CPT3X225-R




Turns Color: Y/O = Yellow Lid with Orange Ramps

END CAPS (Pair Only) MODEL: CPEC3X225



End Caps Color: O = Orange

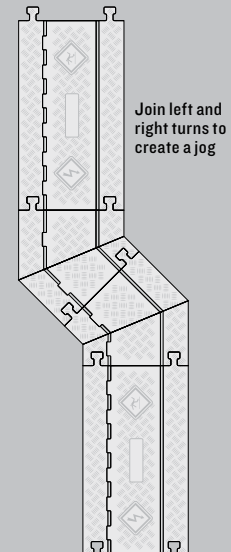

Join left and right turns to create a jog


	MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH*	E: CHANNEL HEIGHT	WEIGHT
45° LEFT TURN	CPT3X225-L	25 in. (63.5 cm)	20 in. (50.8 cm)	3.05 in. (7.75 cm)	2.25 in. (5.72 cm)	2.25 in. (5.72 cm)	15 lb. (6.8 kg)
45° RIGHT TURN	CPT3X225-R	25 in. (63.5 cm)	20 in. (50.8 cm)	3.05 in. (7.75 cm)	2.25 in. (5.72 cm)	2.25 in. (5.72 cm)	15 lb. (6.8 kg)
END CAPS (PAIR)	CPEC3X225	Female: 8.25 in. (20.96 cm) Male: 6 in. (15.24 cm)	20 in. (50.8 cm) 20 in. (50.8 cm)	3.05 in. (7.75 cm) 3.05 in. (7.75 cm)	2.25 in. (5.72 cm) 2.25 in. (5.72 cm)	2.25 in. (5.72 cm) 2.25 in. (5.72 cm)	4 lb. (1.8 kg) 4 lb. (1.8 kg)

ACCESSIBILITY RAMPS for Linebacker 3-Channel Heavy Duty Cable Protectors

CHECKERS 3-CHANNEL ACCESSIBILITY RAMPS feature a gradual slope and slip-resistant surface to ensure a safe crossing point for carts, forklifts, vehicles with small wheels and heavy trucks. In addition, each Checkers' ramp system is manufactured to meet ADA and DDA compliant specifications.



ADA/DDA
Compliant

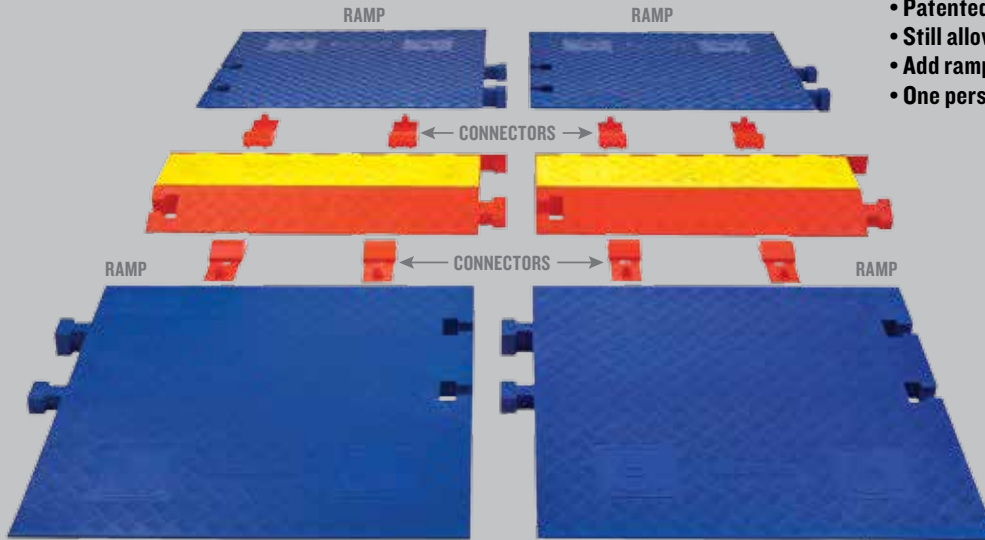

- Patented, modular ADA/DDA Compliant ramps
- Still allows access to cables and cords
- Add ramps when requirements specify
- One person installation - no tools required

LOAD CAPACITY

Max load tested at 70°F (21°C)


20,150 lb./Tire (9,140 kg)
40,300 lb./Axle (18,280 kg)

System shown with 2 Heavy Duty Linebackers, 2 Pairs of Ramps and 8 Connectors
Ramps available only in blue



System shown with 2 pairs of ramps and 8 connectors

RAMPS - CPRP-3

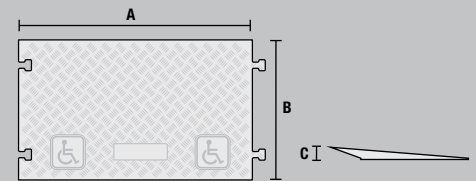

	MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	WEIGHT	COLOR
RAMPS	CPRP-3	36 in. (91.44 cm)	34.81 in. (88.42 cm)	2.88 in. (7.32 cm)	66 lb. (30 kg)	Blue

*Includes 2 ramps and 4 connectors



Linebacker Heavy Duty in use at the Salt Lake City Olympics



Linebacker Heavy Duty in use at a public concert venue



2-CHANNEL HEAVY DUTY

System features patented T-Connectors


FEATURES

- Protects cables and hoses up to 3.25" outside dia.
- Patented T-Connectors to extend to any length
- Reinforced hinged lid for easy cable placement
- All-weather polyurethane construction
- Patented 5-bar tread surface for maximum traction
- Easy to transport, setup, disassemble, and store





T-Connector

MODEL: CP2X325

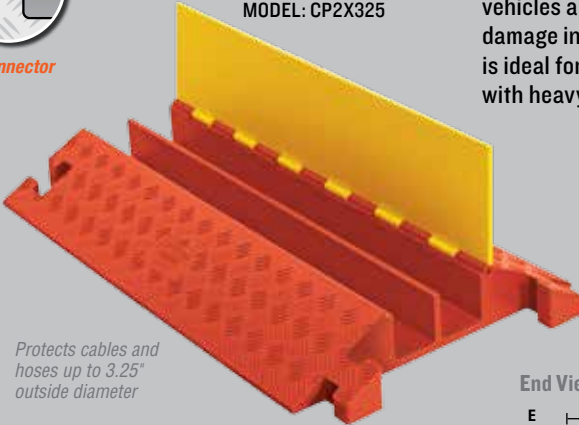

Protects cables and hoses up to 3.25" outside diameter



Lid/Base Color Options




Yellow/Orange = Y/O

LOAD CAPACITY

Max load tested at 70°F (21°C)

10,880 lb./Tire (4,935 kg)
21,760 lb./Axle (9,870 kg)



MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
CP2X325	36 in. (91.4 cm)	22 in. (55.88 cm)	4.13 in. (10.16 cm)	3.25 in. (8.26 cm)	3.25 in. (8.26 cm)	33 lb. (15.0 kg)



Load capacity of up to 21,760 lb. per axle



Linebacker 3-channel in use at a coal mine maintenance shop



4-CHANNEL GENERAL MANUFACTURING


System features patented T-Connectors

FEATURES

- Protects cables and hoses up to 3.0" outside dia.
- Designed for manufacturing facilities
- Patented T-Connectors to extend to any length
- Thick lid and base allow for high volume of traffic
- Reinforced hinged lid for easy cable placement
- Modular interlocking design



T-Connector

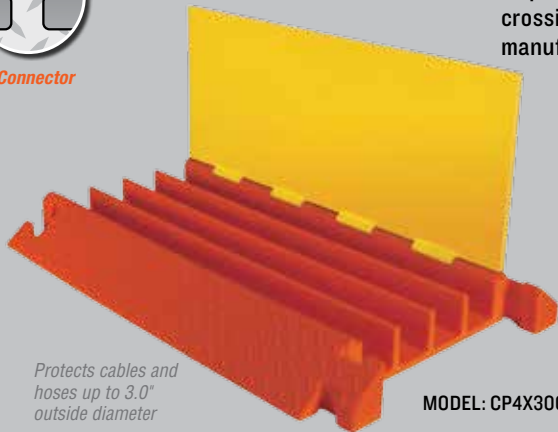

Protects cables and hoses up to 3.0" outside diameter

MODEL: CP4X300

LINEBACKER® 4-CHANNEL GENERAL MANUFACTURING CABLE PROTECTOR with hinged lid protects valuable electrical cables and hose lines from damage while providing a safe crossing in high volume traffic areas. Modular interlocking design is ideal for use in industrial manufacturing facilities and heavy equipment areas.



Lid/Base Color Options



LOAD CAPACITY

Max load tested at 70°F (21°C)


10,100 lb./Tire (4,581 kg)
20,200 lb./Axle (9,163 kg)



MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
CP4X300	36 in. (91.4 cm)	23.875 in. (60.64 cm)	3.875 in. (9.84 cm)	3 in. (7.62 cm)	3 in. (7.62 cm)	42.2 lb. (19.1 kg)



ACCESSORIES for Linebacker 4-Channel General Manufacturing Cable Protectors

45° "Y" CONNECTOR MODEL: CPY4X300





"Y" Connector Color: Y/O = Yellow Lid with Orange Ramps

90° 4-WAY CROSS MODEL: CPC4X300



4-Way Cross Color: Y/O = Yellow Lid with Orange Ramps

END CAPS (Pair Only) MODEL: CPEC4X300

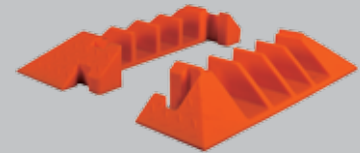

End Caps Color: O = Orange

	MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
45° "Y" CONNECTOR	CPY4X300	24 in. (60.96 cm)	24 in. (60.96 cm)	3.875 in. (9.84 cm)	3 in. (7.62 cm)	3 in. (7.62 cm)	31.85 lb. (14.4 kg)
90° 4-WAY CROSS	CPC4X300	25.5 in. (64.77 cm)	24 in. (60.96 cm)	4 in. (10.16 cm)	3 in. (7.62 cm)	3 in. (7.62 cm)	38.05 lb. (17.3 kg)
END CAPS (PAIR)	CPEC4X300	Female: 6.75 in. (17.15 cm)	23.875 in. (60.64 cm)	3.5 in. (8.89 cm)	3 in. (7.62 cm)	3 in. (7.62 cm)	6.3 lb. (2.9 kg)
		Male: 6.75 in. (17.15 cm)	23.875 in. (60.64 cm)	3.5 in. (8.89 cm)	3 in. (7.62 cm)	3 in. (7.62 cm)	9.45 lb. (4.3 kg)



5-CHANNEL GENERAL PURPOSE

System features patented T-Connectors

FEATURES

- Protects cables and hoses up to 1.3" outside dia.
- Patented T-Connectors to extend to any length
- Reinforced hinged lid for easy cable placement
- All-weather polyurethane construction
- Patented 5-bar tread surface for maximum traction
- Easy to transport, setup, disassemble, and store




T-Connector

MODEL: CP5X125-GP

LINEBACKER® 5-CHANNEL GENERAL PURPOSE with hinged lid provides a safe crossing for vehicles and pedestrian traffic while protecting valuable electrical cables and hose lines from damage in extreme weather conditions and work environments. Modular interlocking design is ideal for use in entertainment venues, sporting events, and most public, commercial, industrial, and utility applications.

Lid/Base Color Options






LOAD CAPACITY

Max load tested at 70°F (21°C)

10,500 lb./Tire (4,763 kg)
21,000 lb./Axle (9,526 kg)

Protects cables and hoses up to 1.3" outside diameter






MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
CP5X125-GP	36 in. (91.44 cm)	17.25 in. (43.82 cm)	1.95 in. (5.0 cm)	1.3 in. (3.3 cm)	1.3 in. (3.3 cm)	22 lb. (10 kg)

ACCESSORIES for Linebacker 5-Channel General Purpose Cable Protectors

END CAPS (Pair Only)


CPEC5X125-GP





End Caps Color: O = Orange

45° "Y" PROTECTOR

MODEL: CPY5X125-GP
(Split or join cable runs)



"Y" Connector Color:
O/Y = Orange Lid with Yellow Ramps

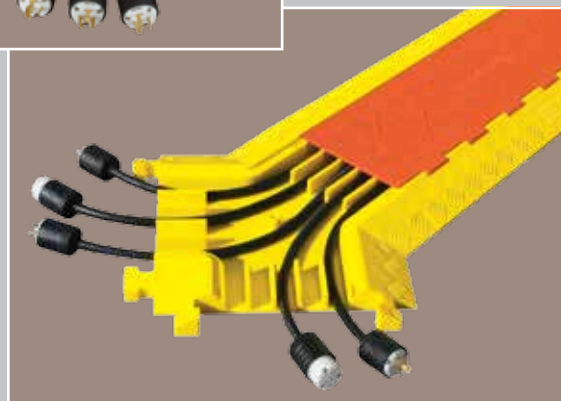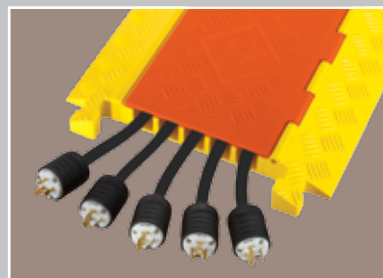

45° "Y" PROTECTOR

END CAPS (PAIR)


MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
CPY5X125-GP	19.75 in. (50.17 cm)	17.25 in. (43.82 cm)	1.95 in. (5.0 cm)	1.3 in. (3.3 cm)	1.3 in. (3.3 cm)	9.4 lb. (4.3 kg)
CPEC5X125-GP	Female: 4.75 in. (12.07 cm)	17.25 in. (43.82 cm)	1.95 in. (5.0 cm)	1.3 in. (3.3 cm)	1.3 in. (3.3 cm)	2.7 lb. (1.2 kg)
	Male: 4.75 in. (12.07 cm)	17.25 in. (43.82 cm)	1.95 in. (5.0 cm)	1.3 in. (3.3 cm)	1.3 in. (3.3 cm)	2.7 lb. (1.2 kg)

ACCESSIBILITY RAMPS AND RAILS for Linebacker 5-Channel General Purpose Cable Protectors

CHECKERS 5-CHANNEL ACCESSIBILITY RAMPS AND RAILS feature a gradual slope and slip-resistant surface to ensure a safe crossing point for carts, forklifts, vehicles with small wheels and heavy trucks. In addition, each Checkers' ramp and rail system is manufactured to meet ADA and DDA compliant specifications.



ADA/DDA
Compliant

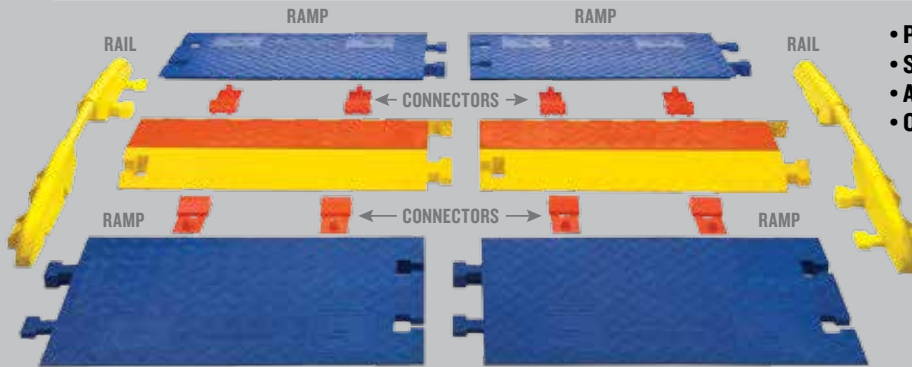

System shown with 2 General Purpose Linebackers, 2 Pairs of Ramps and 8 Connectors.
Ramps available only in blue and rails available only in yellow.


- Patented, modular ADA/DDA Compliant ramps
- Still allows access to cables and cords
- Add ramps and rails when requirements specify
- One person installation - no tools required

LOAD CAPACITY


Max load tested at 70°F (21°C)

20,150 lb./Tire (9,140 kg)
40,300 lb./Axle (18,280 kg)

RAMPS - CPRP-5GP

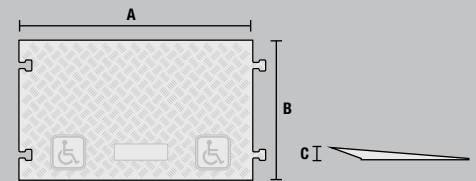

RAILS - CPRL-5GP



	MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	WEIGHT	COLOR
RAMPS	CPRP-5GP	36 in. (91.44 cm) (SINGLE)	21.88 in. (55.58 cm) (SINGLE)	2 in. (5.08 cm)	40 lb. (18.1 kg) (PAIR OF RAMPS)	Blue
RAIL	CPRL-5GP	1.5 in. (3.81 cm)	54 in. (137.16 cm)	2 in. (5.08 cm)	12.7 lb. (5.8 kg)	Yellow

PROTECTOR BRIDGES for Linebacker 5-Channel General Purpose Cable Protectors


CHECKERS 2-CHANNEL CABLE BRIDGES provide additional cable channels while creating a continuous, level, crossing surface for vehicle and pedestrian traffic. These modular accessories allow users to create any number of runs simultaneously by utilizing the space between multiple parallel cable protector runs.

- Patented Protector Bridges

LOAD CAPACITY

Max load tested at 70°F (21°C)

20,150 lb./Tire (9,140 kg)
40,300 lb./Axle (18,280 kg)

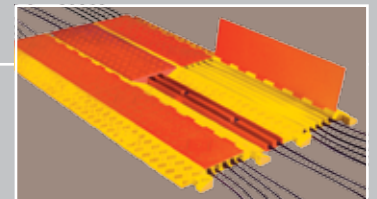

Top Piece


Base Piece

Protects cables and hoses up to 1.5" outside diameter

Complete Bridge

The first expandable system to accommodate an unlimited number of channels!

BRIDGE - CL2X150-GP

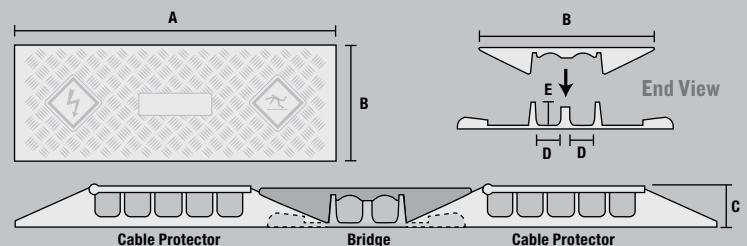

	MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT	COLOR
	CL2X150-GP	36 in. (91.44 cm)	12.5 in. (21.6 cm)	1.875 in. (4.76 cm)	1.5 in. (3.81 cm)	1.5 in. (3.81 cm)	14 lb. (6.4 kg)	Orange

1-CHANNEL GENERAL PURPOSE

System features patented T-Connectors

FEATURES

- Protects cables and hoses up to 2.25" outside dia.
- Patented T-Connectors to extend to any length
- Drop Over or Split Top models available
- All-weather polyurethane construction
- Modular interlocking design is lightweight and easy to transport, setup, disassemble, and store


LINEBACKER® 1-CHANNEL DROP OVER CABLE PROTECTOR offers a quick solution to protect minimal runs of cable and hose lines. These models provide solutions for heavy duty, high load bearing operations as well as lighter duty, general purpose needs.

1.25" SINGLE CHANNEL



T-Connector

Split Top
MODEL: CP1X125-GP

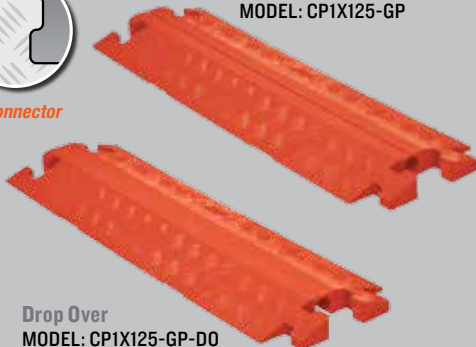

Drop Over
MODEL: CP1X125-GP-DO

Protects cables and hoses
up to 1.25" outside diameter

SPLIT TOP

DROP OVER

COLOR OPTIONS - SPECIFY COLOR AFTER MODEL NUMBER



Orange =
O



Black =
B





Yellow =
Y

LOAD CAPACITY

Max load tested at 70°F (21°C)

11,700 lb./Tire (5,307 kg)
23,400 lb./Axle (10,614 kg)

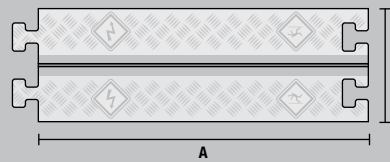


MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	WEIGHT
CP1X125-GP	36 in. (91.44 cm)	11.5 in. (29.21 cm)	1.6 in. (4.06 cm)	1.25 in. (3.18 cm)	13 lb. (5.9 kg)
CP1X125-GP-DO	36 in. (91.44 cm)	11.5 in. (29.21 cm)	1.6 in. (4.06 cm)	1.25 in. (3.18 cm)	13 lb. (5.9 kg)

2.25" SINGLE CHANNEL



T-Connector

Split Top
MODEL: CP1X225-GP

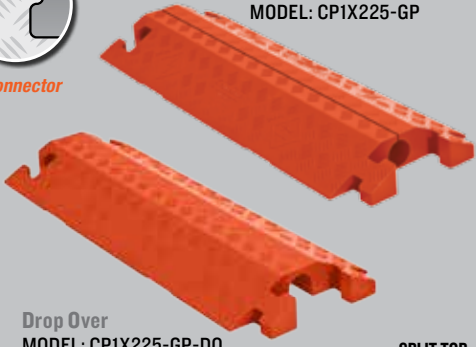

Drop Over
MODEL: CP1X225-GP-DO

Protects cables and hoses
up to 2.25" outside diameter

SPLIT TOP

DROP OVER

COLOR OPTIONS - SPECIFY COLOR AFTER MODEL NUMBER



Orange =
O



Black =
B




Yellow =
Y

LOAD CAPACITY

Max load tested at 70°F (21°C)

8,500 lb./Tire (3,856 kg)
17,000 lb./Axle (7,712 kg)



MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	WEIGHT
CP1X225-GP	36 in. (91.44 cm)	14.25 in. (36.19 cm)	3 in. (7.62 cm)	2.25 in. (5.72 cm)	19 lb. (8.6 kg)
CP1X225-GP-DO	36 in. (91.44 cm)	14.25 in. (36.19 cm)	3 in. (7.62 cm)	2.25 in. (5.72 cm)	19 lb. (8.6 kg)



1.25" Drop
Over Model



1.25" Split
Top Model



2.25" Drop
Over Model



2.25" Split
Top Model


ACCESSIBILITY RAMPS & RAILS for Linebacker 1-Channel General Purpose Cable Protectors

CHECKERS I-CHANNEL ACCESSIBILITY RAMPS AND RAILS feature a gradual slope and slip-resistant surface in order to ensure a safe crossing point for carts, forklifts, vehicles with small wheels and heavy trucks. In addition, each Checkers' ramp and rail system is manufactured to meet ADA and DDA compliant specifications.



ADA/DDA
Compliant

- Patented, modular ADA/DDA Compliant ramps
- Add ramps and rails when requirements specify
- One person installation - no tools required

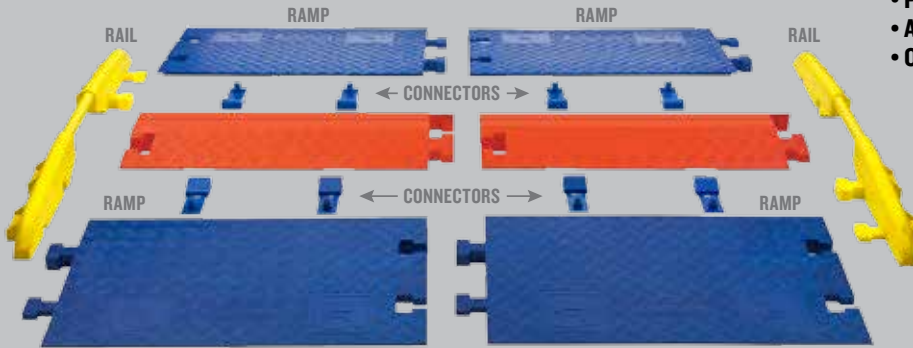

System shown with 2 Linebacker I-Channel General Purpose Open Top Cable Protectors, 2 pairs of ramps, 8 connectors and 2 rails.

Ramps available only in blue and rails available only in yellow.


LOAD CAPACITY

Max load tested at 70°F (21°C)


20,150 lb./Tire (9,140 kg)

40,300 lb./Axle (18,280 kg)

RAMPS - CPRP-1X125 AND CPRP-1X225

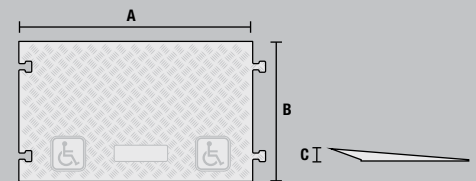

RAILS - CPRL-1X125



FOR 1.25" CHANNEL

RAMPS

MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	WEIGHT	COLOR
CPRP-1X125	36 in. (91.44 cm) (SINGLE RAMP)	21.88 in. (55.58 cm) (SINGLE RAMP)	2 in. (5.08 cm)	40 lb. (18.1 kg) (PAIR OF RAMPS)	Blue
CPRL-1X125	1.5 in. (3.81 cm)	54 in. (137.16 cm)	2 in. (5.08 cm)	12.7 lb. (5.8 kg)	Yellow

RAIL

FOR 2.25" CHANNEL

RAMPS

MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	WEIGHT	COLOR
CPRP-1X225	36 in. (91.44 cm) (SINGLE RAMP)	34.81 in. (88.42 cm) (SINGLE RAMP)	2.88 in. (7.32 cm)	66 lb. (30 kg) (PAIR OF RAMPS)	Blue



Linebacker Heavy Duty with ADA Ramps in use at a street fair event



5-CHANNEL HEAVY DUTY


System features Dog Bone Connectors

FEATURES

- Protects cables and hoses up to 1.0" outside dia.
- The "original" cable protector
- Dog Bone Connectors to extend to any desired length
- Thick lid and base allow for high volume of traffic
- Hinged lid for easy cable placement
- Modular interlocking design



"Dog Bone"
Connector

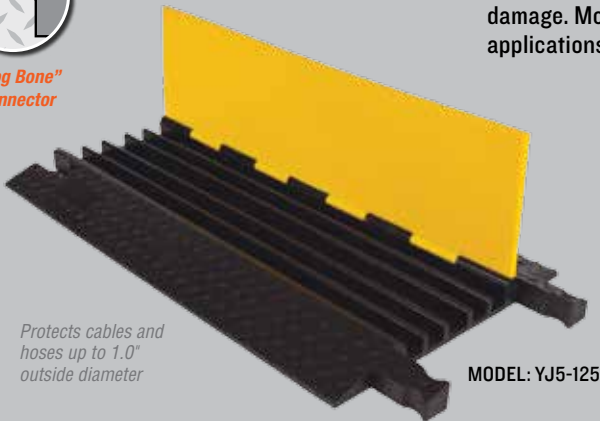

Protects cables and hoses up to 1.0" outside diameter

MODEL: YJ5-125

YELLOW JACKET® 5-CHANNEL CABLE PROTECTOR with hinged lid provides a safe crossing in high volume traffic areas while protecting valuable electrical cables and hose lines from damage. Modular interlocking design is ideal for use in industrial, commercial, and public applications.

Lid/Base Color Options





Yellow/Black =
Y/B

LOAD CAPACITY

Max load tested at 70°F (21°C)

16,300 lb./Tire (7,393 kg)
32,600 lb./Axle (14,787 kg)




*NOTE: Center channel width
is 1.65 in. (4.19 cm)

MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
YJ5-125	36 in. (91.4 cm)	19.75 in. (50.2 cm)	1.875 in. (4.76 cm)	1.375 in. (3.49 cm)	1 in. (2.54 cm)	28.2 lb. (12.8 kg)

ACCESSORIES for Yellow Jacket 5-Channel Heavy Duty Cable Protectors


45° LEFT TURN MODEL: YJ5TL-125



Turns Color:



Y/B = Yellow Lid with Black Ramps

45° RIGHT TURN MODEL: YJ5TR-125



Join left and right
turns to create a jog


END CAPS (Pair Only) MODEL: YJ5EB-125



*NOTE: Center channel width
is 1.65 in. (4.19 cm)

End Caps Color: Y = Yellow

90° 4-WAY CROSS MODEL: YJ5X-125 (Split or join cable runs)



	MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH*	E: CHANNEL HEIGHT	WEIGHT
45° LEFT TURN	YJ5TL-125	24 in. (61 cm)	19.75 in. (50.2 cm)	1.875 in. (4.76 cm)	1.25 in. (3.18 cm)	1.325 in. (3.37 cm)	14.2 lb. (6.4 kg)
45° RIGHT TURN	YJ5TR-125	24 in. (61 cm)	19.75 in. (50.2 cm)	1.875 in. (4.76 cm)	1.25 in. (3.18 cm)	1.325 in. (3.37 cm)	14.2 lb. (6.4 kg)
END CAPS (PAIR)	YJ5EB-125	Female: 7.375 in. (18.7 cm)	19.75 in. (50.2 cm)	1.875 in. (4.76 cm)	1.25 in. (3.18 cm)	1.125 in. (2.86 cm)	4.05 lb. (1.8 kg)
		Male: 4.25 in. (10.8 cm)	19.75 in. (50.2 cm)	1.875 in. (4.76 cm)	1.25 in. (3.18 cm)	1.125 in. (2.86 cm)	3.45 lb. (1.6 kg)
90° 4-WAY CROSS	YJ5X-125	A= 28.5 in. (72.4 cm) A2= 24.5 in. (62.2 cm)	19.75 in. (50.2 cm)	1.875 in. (4.76 cm)	1.339 in. (3.4 cm)	1.325 in. (3.37 cm)	23.1 lb. (10.5 kg)

AMS® ACCESSIBILITY RAMPS for Yellow Jacket 5-Channel Heavy Duty Cable Protectors

CHECKERS 5-CHANNEL AMS® (Advanced Modular System) ACCESSIBILITY RAMPS feature a gradual slope and slip-resistant surface to ensure a safe crossing point for carts, forklifts, vehicles with small wheels and heavy trucks. In addition, each Checkers' Accessibility Ramp system is manufactured to meet ADA and DDA compliant specifications.



ADA/DDA
Compliant

Features patented design and "Hourglass" connector system (with adapter for Dog Bone connector system)



Channel height x width for AMS Center Section and Interconnect is 1.25 in. x 1.375 in.

Ramps: Yellow

Side Ramps: Blue

AMS and Interconnect:

Yellow lid with black base

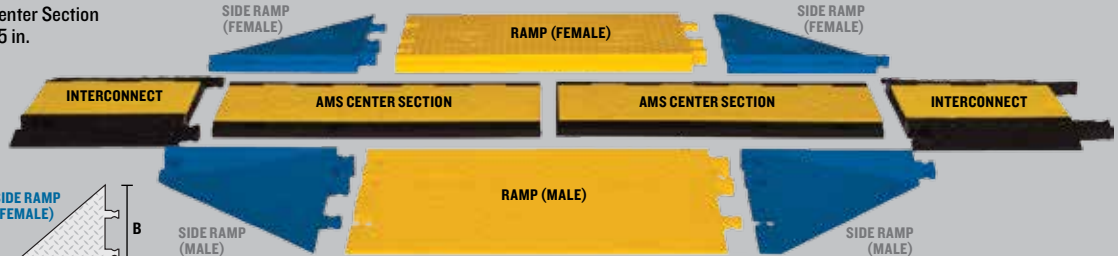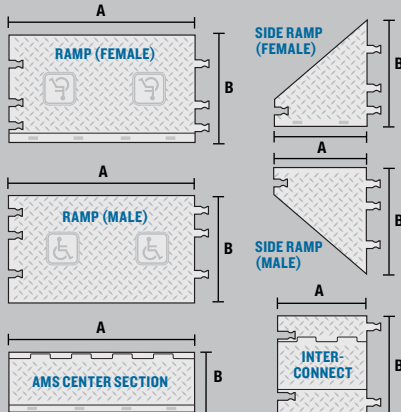

*NOTE: Interconnects can connect to Guard Dog or Yellow Jacket 5-Channel

	MODEL	A: LENGTH	B: WIDTH	HEIGHT	WEIGHT
RAMP (FEMALE)	WSA-125-RFAH-DY	36 in. (91.44 cm)	20.38 in. (51.75 cm)	1.875 in. (4.76 cm)	26 lb. (11.8 kg)
RAMP (MALE)	WSA-125-RMAH-DY	36 in. (91.44 cm)	20 in. (50.8 cm)	1.875 in. (4.76 cm)	24.85 lb. (11.3 kg)
SIDE RAMPS (FEMALE)	WSA-125-BFF-BLU	17.75 in. (45.09 cm)	20.5 in. (52.07 cm)	1.875 in. (4.76 cm)	16.8 lb. (7.6 kg)
SIDE RAMPS (MALE)	WSA-125-BFM-BLU	17.75 in. (45.09 cm)	20.5 in. (52.07 cm)	1.875 in. (4.76 cm)	18.9 lb. (8.6 kg)
AMS CENTER SECTION	YJ5-125-AMS-CTR	36 in. (91.44 cm)	11.75 in. (29.85 cm)	1.875 in. (4.76 cm)	16.7 lb. (7.6 kg)
INTERCONNECT*	YJ51-125	17.88 in. (45.4 cm)	19.75 in. (50.17 cm)	1.875 in. (4.76 cm)	M: 16 lb. (7.3 kg) F: 15.6 lb. (7.1 kg)

AMS® ACCESSIBILITY RAMP KITS for Yellow Jacket 5-Channel Heavy Duty Cable Protectors



KIT 1

KIT 1 - includes:

- 2 Ramps
- 4 Blue Side Ramps
- 2 AMS Center Sections
- 2 Interconnects*

*NOTE: Interconnects can connect to Guard Dog or Yellow Jacket 5-Channel

LOAD CAPACITY

Max load tested at 70°F (21°C)

16,300 lb./Tire (7,393 kg)

32,600 lb./Axle (14,787 kg)

AMS KIT 1

MODEL	LENGTH	WIDTH	HEIGHT	WEIGHT
WSA-125-KIT1-HS	111.13 in. (228.3 cm)	51.25 in. (130.2 cm)	1.875 in. (4.76 cm)	151.5 lb. (68.7 kg)



KIT 2

KIT 2 - includes:

- 2 Ramps
- 4 Blue Side Ramps
- 2 AMS Center Sections

AMS KIT 2

MODEL	LENGTH	WIDTH	HEIGHT	WEIGHT
WSA-125-KIT2-HS	75.38 in. (191.5 cm)	51.25 in. (130.2 cm)	1.875 in. (4.76 cm)	101 lb. (45.8 kg)



AMS KIT 3

KIT 3

KIT 3 - includes:

- 2 Ramps
- 1 AMS Center Section

MODEL	LENGTH	WIDTH	HEIGHT	WEIGHT
WSA-125-KIT3-HS	36 in. (91.44 cm)	51.25 in. (130.2 cm)	1.875 in. (4.76 cm)	67.5 lb. (30.6 kg)



4-CHANNEL HEAVY DUTY


System features Dog Bone Connectors

FEATURES

- Protects cables and hoses up to 1.25" outside dia.
- The "original" cable protector
- Dog Bone Connectors to extend to any desired length
- Thick lid and base allow for high volume of traffic
- Hinged lid for easy cable placement
- Modular interlocking design



"Dog Bone"
Connector

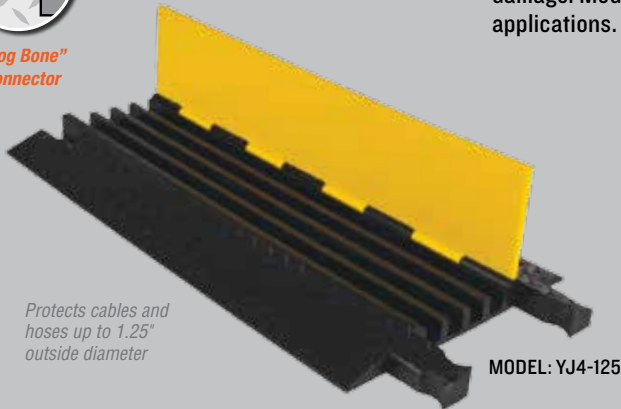

Protects cables and hoses up to 1.25" outside diameter

MODEL: YJ4-125

YELLOW JACKET® 4-CHANNEL CABLE PROTECTOR with hinged lid provides a safe crossing in high volume traffic areas while protecting valuable electrical cables and hose lines from damage. Modular interlocking design is ideal for use in industrial, commercial, and public applications.

Lid/Base Color Options





Yellow/Black =
Y/B

LOAD CAPACITY

Max load tested at 70°F (21°C)

16,300 lb./Tire (7,393 kg)
32,600 lb./Axle (14,787 kg)




MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
YJ4-125	36 in. (91.4 cm)	17.5 in. (44.45 cm)	2 in. (5.08 cm)	1.25 in. (3.18 cm)	1.25 in. (3.18 cm)	23.5 lb. (10.7 kg)

ACCESSORIES for Yellow Jacket 4-Channel Heavy Duty Cable Protectors


45° LEFT TURN

MODEL: YJ4TL-125






45° RIGHT TURN

MODEL: YJ4TR-125



END CAPS (Pair Only)

MODEL: YJ4EB-125

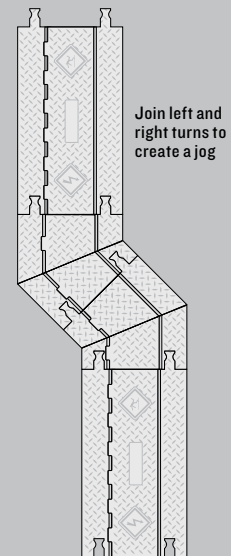

Join left and right turns to create a jog

Turns Color: Y/B = Yellow Lid with Black Ramps

End Caps Color: Y = Yellow

	MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
45° LEFT TURN	YJ4TL-125	24.5 in. (62.23 cm)	17.875 in. (45.4 cm)	1.875 in. (4.76 cm)	1.375 in. (3.49 cm)	1.25 in. (3.18 cm)	13.1 lb. (5.9 kg)
45° RIGHT TURN	YJ4TR-125	24.5 in. (62.23 cm)	17.875 in. (45.4 cm)	1.875 in. (4.76 cm)	1.375 in. (3.49 cm)	1.25 in. (3.18 cm)	13.1 lb. (5.9 kg)
END CAPS (PAIR)	YJ4EB-125	Female: 7.25 in. (18.42 cm) Male: 4.25 in. (10.8 cm)	17.625 in. (44.77 cm) 17.625 in. (44.77 cm)	2 in. (5.08 cm) 2 in. (5.08 cm)	1.25 in. (3.18 cm) 1.25 in. (3.18 cm)	1.25 in. (3.18 cm) 1.25 in. (3.18 cm)	3.8 lb. (1.7 kg) 3 lb. (1.4 kg)

CHECKERS®

INDUSTRIAL SAFETY PRODUCTS

CABLE AND HOSE PROTECTORS IN ACTION

THE WORD IS OUT

"Checkers was willing to step forward and create the product we needed. Working with them has been great."

- Kyle Lee, Associate Engineer,
Consolidated Edison Company of New York



Yellow Jackets in use at a military operation



Guard Dog Low Profiles in use at an outdoor community event



Linebacker Heavy Duty in use at a drilling rig



Guard Dogs in use at an outdoor concert venue



Guard Dogs in use at a traffic crossing



3-CHANNEL HEAVY DUTY


System features Dog Bone Connectors

FEATURES

- Protects cables and hoses up to 2.125" outside dia.
- The "original" cable protector
- Dog Bone Connectors to extend to any desired length
- Thick lid and base allow for high volume of traffic
- Hinged lid for easy cable placement
- Modular interlocking design



"Dog Bone"
Connector

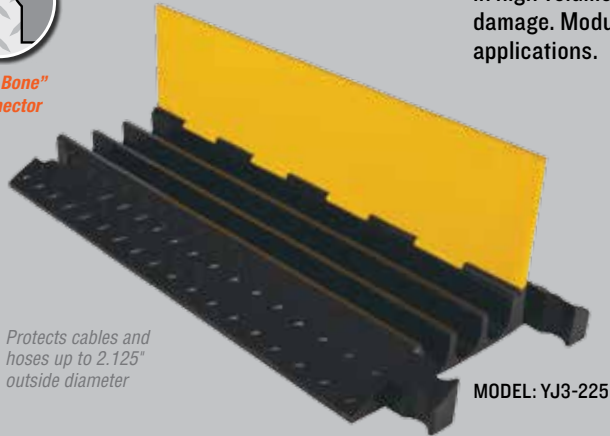

Protects cables and hoses up to 2.125" outside diameter

MODEL: YJ3-225

YELLOW JACKET® 3-CHANNEL CABLE PROTECTOR with hinged lid provides a safe crossing in high volume traffic areas while protecting valuable electrical cables and hose lines from damage. Modular interlocking design is ideal for use in industrial, commercial, and public applications.

Lid/Base Color Options





Yellow/Black =
Y/B

LOAD CAPACITY

Max load tested at 70°F (21°C)


14,210 lb./Tire (6,446 kg)
28,420 lb./Axle (12,892 kg)




MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
YJ3-225	36 in. (91.4 cm)	18.5 in. (50.8 cm)	2.875 in. (7.3 cm)	2.125 in. (5.08 cm)	2.125 in. (5.4 cm)	34.15 lb. (15.5 kg)

ACCESSORIES for Yellow Jacket 3-Channel Heavy Duty Cable Protectors



45° LEFT TURN MODEL: YJ3TL-225




45° RIGHT TURN MODEL: YJ3TR-225



END CAPS (Pair Only) MODEL: YJ3EB-225



End Caps Color: Y = Yellow

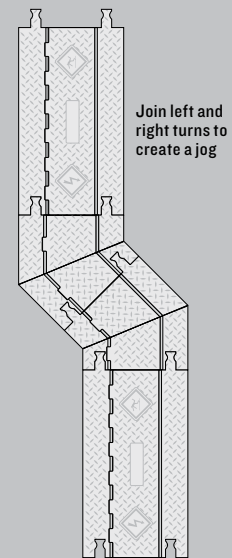

Join left and right turns to create a jog

Turns Color: Y/B = Yellow Lid with Black Ramps

	MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
45° LEFT TURN	YJ3TL-225	23.5 in. (59.69 cm)	18.75 in. (47.63 cm)	2.875 in. (7.3 cm)	2.125 in. (5.4 cm)	2.125 in. (5.4 cm)	19 lb. (8.6 kg)
45° RIGHT TURN	YJ3TR-225	23.5 in. (59.69 cm)	18.75 in. (47.63 cm)	2.875 in. (7.3 cm)	2.125 in. (5.4 cm)	2.125 in. (5.4 cm)	18.8 lb. (8.5 kg)
END CAPS (PAIR)	YJ3EB-225	Female: 8.25 in. (20.96 cm)	18.625 in. (50.17 cm)	3 in. (7.62 cm)	2.125 in. (5.4 cm)	2.125 in. (5.4 cm)	6.2 lb. (2.8 kg)
		Male: 8.375 in. (21.27 cm)	18.625 in. (50.17 cm)	3 in. (7.62 cm)	2.125 in. (5.4 cm)	2.125 in. (5.4 cm)	8.2 lb. (3.7 kg)

AMS® ACCESSIBILITY RAMPS for Yellow Jacket 3-Channel Heavy Duty Cable Protectors

CHECKERS 3-CHANNEL AMS® (Advanced Modular System) ACCESSIBILITY RAMPS feature a gradual slope and slip-resistant surface to ensure a safe crossing point for carts, forklifts, vehicles with small wheels and heavy trucks. In addition, each Checkers' Accessibility Ramp system is manufactured to meet ADA and DDA compliant specifications.



ADA/DDA
Compliant

Features patented design and "Hourglass" connector system (with adapter for Dog Bone connector system)



Channel height x width for 3-Channel AMS

Center Section is 2.25 in. x 2.25 in.

Ramps: Yellow


Side Ramps: Blue

AMS: Yellow Lid with Black Base

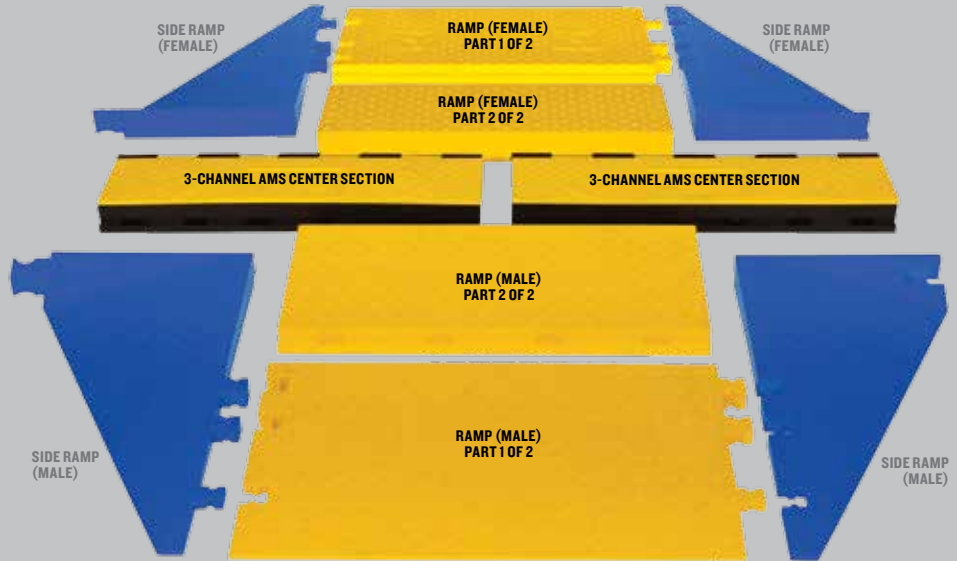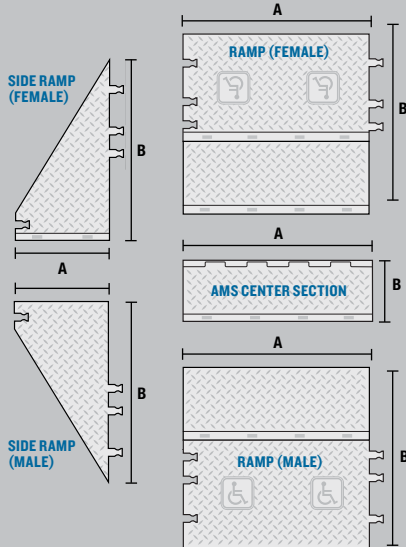

	MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	WEIGHT
RAMP (FEMALE)	WSA-225-RFAH-DY	36 in. (91.44 cm)	33.25 in. (84.46 cm)	3 in. (7.62 cm)	90.1 lb. (40.9 kg)
RAMP (MALE)	WSA-225-RMAH-DY	36 in. (91.44 cm)	33.375 in. (84.77 cm)	3 in. (7.62 cm)	90.1 lb. (40.9 kg)
SIDE RAMPS (FEMALE)	WSA-225-BFF-BLU	17.75 in. (45.09 cm)	35.5 in. (90.17 cm)	3 in. (7.62 cm)	17.2 lb. (7.8 kg) (EACH)
SIDE RAMPS (MALE)	WSA-225-BFM-BLU	17.75 in. (45.09 cm)	35.5 in. (90.17 cm)	3 in. (7.62 cm)	18.4 lb. (8.3 kg) (EACH)
3-CHANNEL AMS CENTER SECTION	YJ3-225-AMS-CTR	36 in. (91.44 mm)	9.87 in. (25.07 cm)	3 in. (7.62 cm)	19.5 lb. (8.8 kg)

AMS® ACCESSIBILITY RAMP KITS for Yellow Jacket 3-Channel Heavy Duty Cable Protectors

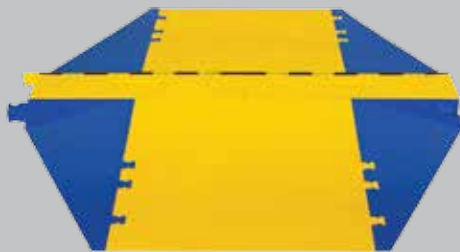

AMS KIT 1

LOAD CAPACITY

Max load tested at 70°F (21°C)


14,210 lb./Tire (6,446 kg)
28,420 lb./Axle (12,892 kg)

KIT 1

KIT 1 - includes:

- 2 Ramps
- 4 Blue Side Ramps
- 2 AMS Center Sections

MODEL	LENGTH	WIDTH	HEIGHT	WEIGHT
WSA-225-KIT1-HS	71.25 in. (180.98 cm)	77.875 in. (197.8 cm)	3 in. (7.62 cm)	290.4 lb. (131.7 kg)



AMS KIT 2

KIT 2

KIT 2 - includes:

- 2 Ramps
- 1 AMS Center Section

MODEL	LENGTH	WIDTH	HEIGHT	WEIGHT
WSA-225-KIT2-HS	36 in. (91.44 cm)	77.875 in. (197.8 cm)	3 in. (7.62 cm)	199.7 lb. (90.6 kg)



2-CHANNEL HEAVY DUTY


System features Dog Bone Connectors

FEATURES

- Protects cables and hoses up to 3.75" outside dia.
- The "original" cable protector
- Dog Bone Connectors to extend to any desired length
- Thick lid and base allow for high volume of traffic
- Hinged lid for easy cable placement
- Modular interlocking design



"Dog Bone"
Connector

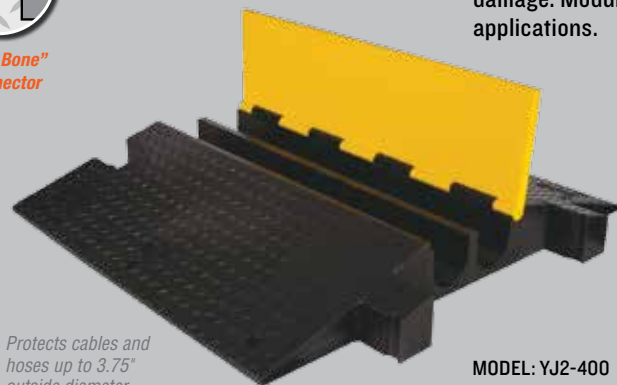

Protects cables and hoses up to 3.75" outside diameter

MODEL: YJ2-400

YELLOW JACKET® 2-CHANNEL CABLE PROTECTOR with hinged lid provides a safe crossing in high volume traffic areas while protecting valuable electrical cables and hose lines from damage. Modular interlocking design is ideal for use in industrial, commercial, and public applications.

Lid/Base Color Options





Yellow/Black =
Y/B

LOAD CAPACITY

Max load tested at 70°F (21°C)

7,990 lb./Tire (3,624 kg)
15,980 lb./Axle (7,248 kg)

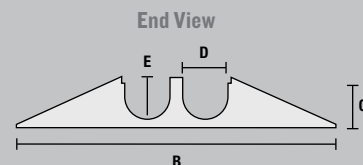

MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
YJ2-400	36 in. (91.4 cm)	42.125 in. (106.7 cm)	5.125 in. (14.9 cm)	3.875 in. (9.84 cm)	3.75 in. (9.53 cm)	147 lb. (66.7 kg)



Yellow Jackets in use at Arlington National Cemetery



Linebackers in use at a military communications tower



1-CHANNEL HEAVY DUTY

System features *Dog Bone Connectors*

FEATURES


- Protects cables and hoses up to 5.0" outside dia.
- The "original" cable protector
- Dog Bone Connectors to extend to any desired length
- Thick lid and base allow for high volume of traffic
- Hinged lid for easy cable placement
- Modular interlocking design

YELLOW JACKET® 1-CHANNEL CABLE PROTECTORS with hinged lid protect valuable large electrical cables and hose lines from damage while providing a safe crossing in high volume traffic areas. Modular interlocking design is ideal for extremely heavy duty industrial areas.

YELLOW JACKET HEAVY DUTY 1 CHANNEL - 3 INCH



"Dog Bone"
Connector

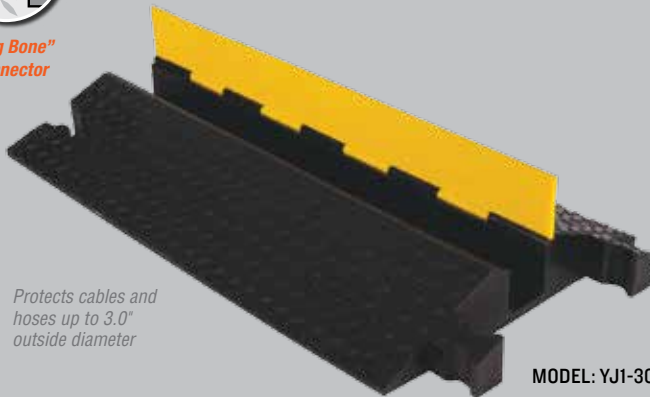

Protects cables and hoses up to 3.0" outside diameter

MODEL: YJ1-300



Lid/Base Color Options



LOAD CAPACITY

Max load tested at 70°F (21°C)

7,990 lb./Tire (3,624 kg)
15,980 lb./Axle (7,248 kg)




MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
YJ1-300	36 in. (91.44 cm)	20.625 in. (52.39 cm)	3.875 in. (9.84 cm)	3.0 in. (7.62 cm)	3.0 in. (7.62 cm)	42.6 lb. (19.3 kg)

YELLOW JACKET HEAVY DUTY 1 CHANNEL - 5 INCH



"Dog Bone"
Connector

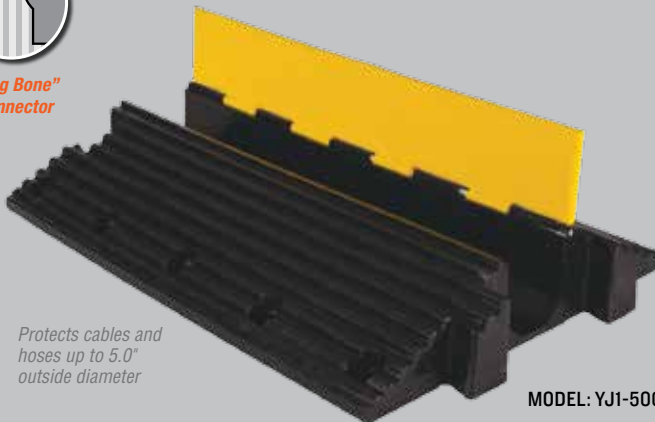

Protects cables and hoses up to 5.0" outside diameter

MODEL: YJ1-500



Lid/Base Color Options



LOAD CAPACITY

Max load tested at 70°F (21°C)

9,435 lb./Tire (4,259 kg)
18,870 lb./Axle (8,518 kg)



MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
YJ1-500	36 in. (91.44 cm)	26.75 in. (67.95 cm)	5.875 in. (14.92 cm)	5 in. (12.7 cm)	5 in. (12.7 cm)	92 lb. (41.7 kg)



HEAVY DUTY AMS SYSTEMS

System features Dog Bone Connectors

FEATURES

- Protects cables and hoses up to 2.25" outside dia.
- Connect unlimited center sections and add ramps
- Dog Bone Connectors to extend to any desired length
- 5 or 3-Channel Systems available
- Hinged lid for easy cable placement
- Patented technology with modular interlocking design

YELLOW JACKET HEAVY DUTY 5-CHANNEL AMS® SYSTEM



"Dog Bone"
Connector

The YELLOW JACKET® 5-CHANNEL AMS® (Advanced Modular System) is patented technology that utilizes separate cable protector sections and ramps to create a system that is fully expandable to hold an unlimited number of cables. By detaching the ramps, you can also quickly add cable runs and ADA compatible side ramps to existing systems. The Yellow Jacket AMS readily handles heavy truck and bus traffic while providing easy access for pedestrians, carts and wheelchairs. Hinged lids make for easy loading of cables and hoses.

Lid/Base Color Options

Yellow/Black =
Y/B

LOAD CAPACITY


Max load tested at 70°F (21°C)

16,300 lb./Tire (7,393 kg)


32,600 lb./Axle (14,787 kg)

"System" includes 1 AMS Center Section and 1 pair of Ramps

AMS CENTER SECTION - YJ5-125-AMS-CTR

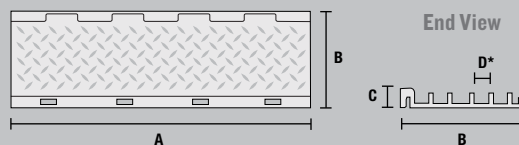


AMS RAMPS - YJ5-125-AMS-F-B / YJ5-125-AMS-M-B

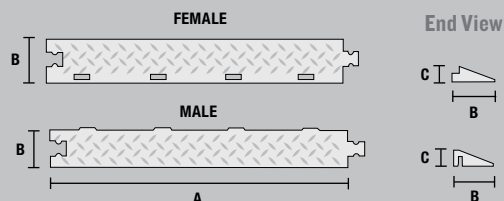

*NOTE: Center channel width is 1.65 in. (4.19 cm)

"System" includes 1 AMS Center Section and 1 pair of Ramps

	MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH*	E: CHANNEL HEIGHT	WEIGHT
AMS SYSTEM	YJ5-125-AMS	36 in. (91.44 cm)	19.75 in. (50.17 cm)	2 in. (5.08 cm)	1.375 in. (3.49 cm)	1.25 in. (3.18 cm)	29.35 lb. (13.3 kg)
AMS CENTER SECTION	YJ5-125-AMS-CTR	36 in. (91.44 cm)	11.75 in. (29.85 cm)	1.875 in. (4.76 cm)	1.375 in. (3.49 cm)	1.25 in. (3.18 cm)	16.65 lb. (7.6 kg)
AMS RAMP FEMALE	YJ5-125-AMS-F-B	36 in. (91.44 cm)	5.125 in. (13.02 cm)	2 in. (5.08 cm)	N/A	N/A	7.35 lb. (3.3 kg)
AMS RAMP MALE	YJ5-125-AMS-M-B	36 in. (91.44 cm)	5 in. (12.7 cm)	2 in. (5.08 cm)	N/A	N/A	5.35 lb. (2.4 kg)

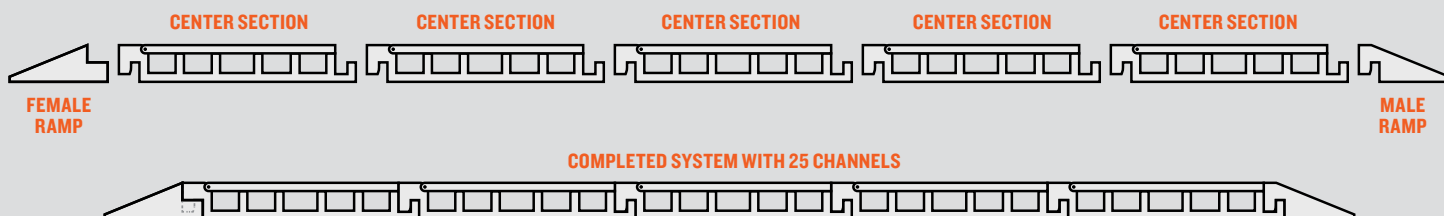


YELLOW JACKET HEAVY DUTY 3-CHANNEL AMS® SYSTEM



"Dog Bone"
Connector

The YELLOW JACKET® 3-CHANNEL AMS® (Advanced Modular System) is patented technology that utilizes separate cable protector sections and ramps to create a system that is fully expandable to hold an unlimited number of cables. By detaching the ramps, you can also quickly add cable runs and ADA compatible side ramps to existing systems. The Yellow Jacket AMS readily handles heavy truck and bus traffic while providing easy access for pedestrians, carts and wheelchairs. Hinged lids make for easy loading of cables and hoses.

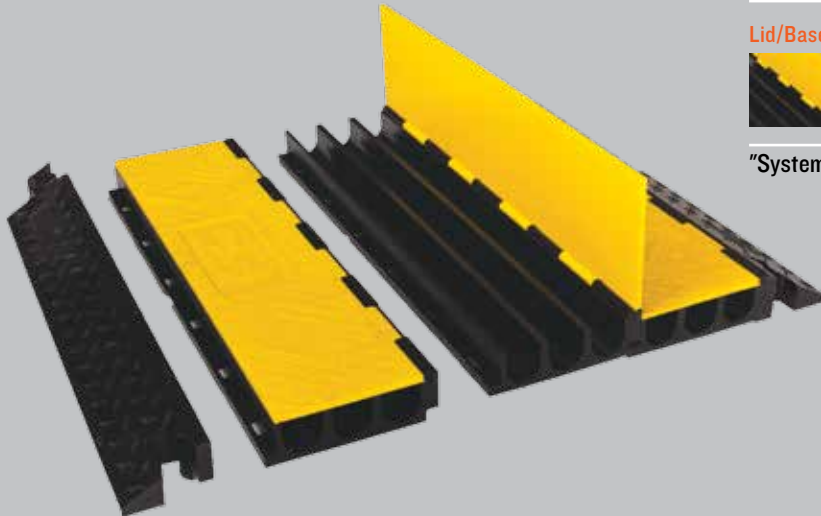

Protects cables and hoses up to 2.25" outside diameter

Lid/Base Color Options



Yellow/Black =
Y/B


LOAD CAPACITY

Max load tested at 70°F (21°C)


14,210 lb./Tire (6,446 kg)
28,420 lb./Axle (12,892 kg)

"System" includes 1 AMS Center Section and 1 pair of Ramps

AMS CENTER SECTION - YJ3-225-AMS-CTR

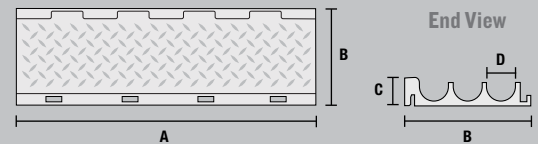

AMS RAMPS - YJ3-225-AMS-F-B / YJ3-225-AMS-M-B

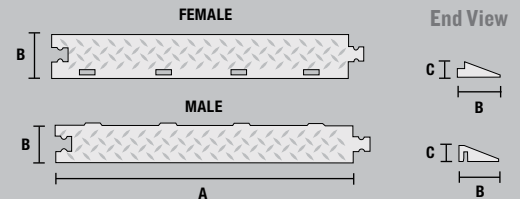

"System" includes 1 AMS Center Section and 1 pair of Ramps

	MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	
AMS SYSTEM	YJ3-225-AMS	36 in. (91.44 cm)	18.61 in. (47.27 cm)	3 in. (7.62 cm)	2.25 in. (5.72 cm)	2.25 in. (5.72 cm)	39 lb. (17.7 kg)
AMS CENTER SECTION	YJ3-225-AMS-CTR	36 in. (91.44 cm)	9.87 in. (25.07 cm)	3 in. (7.62 cm)	2.25 in. (5.72 cm)	2.25 in. (5.72 cm)	19.5 lb. (8.8 kg)
AMS RAMP FEMALE	YJ3-225-AMS-F-B	36 in. (91.44 cm)	5.5 in. (13.97 cm)	3 in. (7.62 cm)	N/A	N/A	10.1 lb. (4.6 kg)
AMS RAMP MALE	YJ3-225-AMS-M-B	36 in. (91.44 cm)	4.7 in. (11.96 cm)	3 in. (7.62 cm)	N/A	N/A	9.4 lb. (4.3 kg)



AMS system used on public sidewalks



AMS in use at Navel dock yard



5-CHANNEL GENERAL PURPOSE


System features Dog Bone Connectors

FEATURES

- Protects cables and hoses up to 1.325" outside dia.
- Dog Bone Connectors to extend to any desired length
- Reinforced hinged lid for easy cable placement
- All-weather polyurethane construction
- Patented 5-bar tread surface for maximum traction
- Includes four through-holes for temporary mounting



"Dog Bone"
Connector

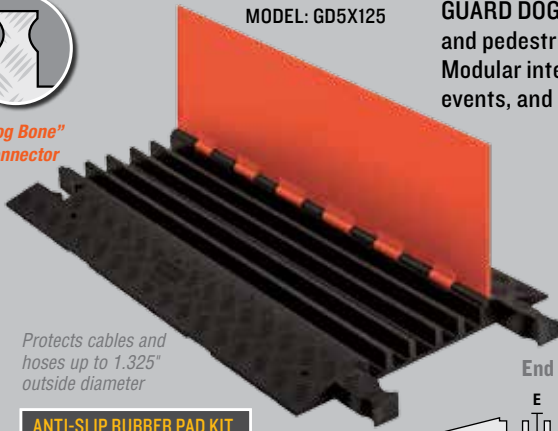

MODEL: GD5X125

GUARD DOG® 5-CHANNEL CABLE PROTECTOR with hinged lid provides a safe crossing for vehicle and pedestrian traffic while protecting valuable electrical cables and hose lines from damage. Modular interlocking design is ideal for use in amusement parks, entertainment venues, sporting events, and most public, commercial, industrial, construction, and utility applications.

Lid/Base Color Options - Specify after model number



Orange/Black =
O/B



Black/Black =
B/B


LOAD CAPACITY

Max load tested at 70°F (21°C)


10,500 lb./Tire (4,763 kg)
21,000 lb./Axle (9,526 kg)

ANTI-SLIP RUBBER PAD KIT

Available for GD5X125. Kit includes 10 anti-slip rubber pads (Model CPRPKIT1-10). Checkers' Clear Super Glue is also offered for permanent application of Rubber Pads.




*NOTE: Center channel width is 1.6 in. (4.06 cm)



MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH*	E: CHANNEL HEIGHT	WEIGHT
GD5X125	36 in. (91.4 cm)	19.75 in. (50.17 cm)	1.875 in. (4.76 cm)	1.339 in. (3.4 cm)	1.325 in. (3.37 cm)	21 lb. (9.6 kg)

ACCESSORIES for Guard Dog 5-Channel General Cable Protectors


45° LEFT TURN
MODEL: GDT5X125-L



Turns Color:



O/B = Orange Lid with Black Ramps

45° RIGHT TURN
MODEL: GDT5X125-R



Join left and right
turns to create a jog


END CAPS (Pair Only)
MODEL: GDEC5X125



*NOTE: Center channel width
is 1.6 in. (4.06 cm)

End Caps Color: O = Orange

90° 4-WAY CROSS
MODEL: GDCR5X125
(Split or join cable runs)



Cross Color: O/B = Orange Lid with Black Base


	MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH*	E: CHANNEL HEIGHT	WEIGHT
45° LEFT TURN	GDT5X125-L	24.5 in. (62.23 cm)	19.75 in. (50.17 cm)	1.875 in. (4.76 cm)	1.339 in. (3.4 cm)	1.325 in. (3.37 cm)	11 lb. (5.0 kg)
45° RIGHT TURN	GDT5X125-R	24.5 in. (62.23 cm)	19.75 in. (50.17 cm)	1.875 in. (4.76 cm)	1.339 in. (3.4 cm)	1.325 in. (3.37 cm)	11 lb. (5.0 kg)
END CAPS (PAIR)	GDEC5X125	Female: 8.75 in. (22.23 cm)	19.75 in. (50.17 cm)	1.875 in. (4.76 cm)	1.339 in. (3.4 cm)	1.325 in. (3.37 cm)	3 lb. (1.4 kg)
		Male: 5.25 in. (13.34 cm)	19.75 in. (50.17 cm)	1.875 in. (4.76 cm)	1.339 in. (3.4 cm)	1.325 in. (3.37 cm)	3 lb. (1.4 kg)
90° 4-WAY CROSS	GDCR5X125	A= 28.5 in. (72.39 cm) A2= 24.5 in. (62.23 cm)	19.75 in. (50.17 cm)	1.875 in. (4.76 cm)	1.339 in. (3.4 cm)	1.325 in. (3.37 cm)	23.1 lb. (10.5 kg)

ACCESSIBILITY RAMPS AND RAILS for Guard Dog 5-Channel General Cable Protectors

CHECKERS 5-CHANNEL ACCESSIBILITY RAMPS AND RAILS feature a gradual slope and slip-resistant surface to ensure a safe crossing point for carts, forklifts, vehicles with small wheels and heavy trucks. In addition, each Checkers' ramp and rail system is manufactured to meet ADA and DDA compliant specifications.



ADA/DDA
Compliant

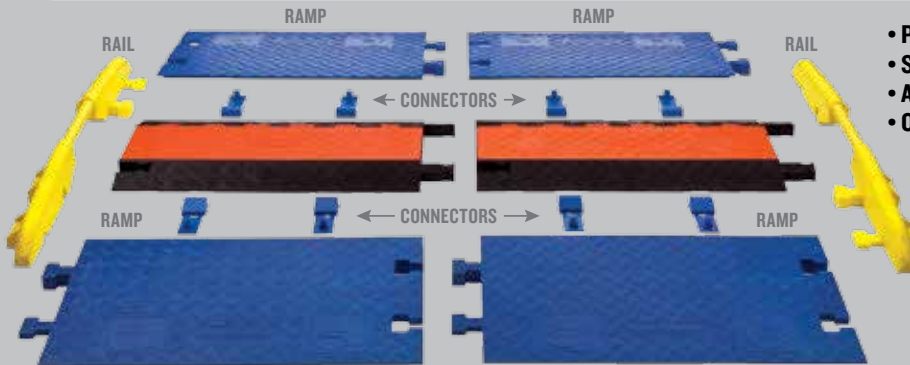

System shown with 2 General Purpose Guard Dogs, 2 pairs of ramps, 8 connectors and 2 rails.
Ramps available only in blue and rails available only in yellow.

- Patented, modular ADA/DDA Compliant ramps
- Still allows access to cables and cords
- Add ramps and rails when requirements specify
- One person installation - no tools required


LOAD CAPACITY

Max load tested at 70°F (21°C)


20,150 lb./Tire (9,140 kg)

40,300 lb./Axle (18,280 kg)

RAMPS - CPRP-5GD

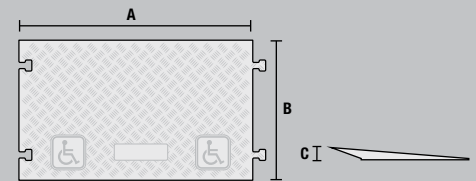

RAILS - CPRL-5GD



	MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	WEIGHT	COLOR
RAMPS	CPRP-5GD	36 in. (91.44 cm) (SINGLE)	21.88 in. (55.58 cm) (SINGLE)	2 in. (5.08 cm)	40 lb. (18.1 kg) (PAIR OF RAMPS)	Blue
RAIL	CPRL-5GD	2 in. (5.08 cm)	55.5 in. (140.97 cm)	2 in. (5.08 cm)	12.75 lb. (5.8 kg)	Yellow

PROTECTOR BRIDGES for Guard Dog 5-Channel General Cable Protectors

CHECKERS 2-CHANNEL CABLE BRIDGES provide additional cable channels while creating a continuous, level, crossing surface for vehicle and pedestrian traffic. These modular accessories allow users to create any number of runs simultaneously by utilizing the space between multiple parallel cable protector runs.


- Patented Protector Bridges

LOAD CAPACITY

Max load tested at 70°F (21°C)

10,500 lb./Tire (4,763 kg)

21,000 lb./Axle (9,526 kg)

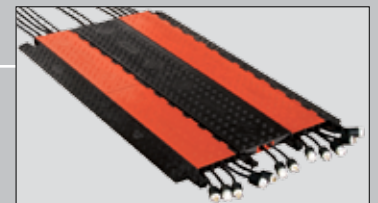

Top Piece


Base Piece

Protects cables and hoses up to 1.5" outside diameter

Complete Bridge

The first expandable system to accommodate an unlimited number of channels!

BRIDGE - CL2X150-GD5

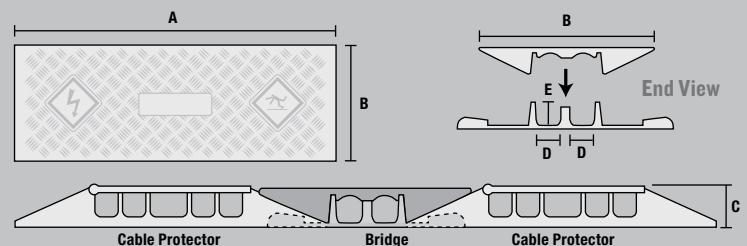

	MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT	COLOR
	CL2X150-GD5	36 in. (91.44 cm)	13 in. (33.02 cm)	2 in. (5.08 cm)	1.5 in. (3.81 cm)	1.5 in. (3.81 cm)	16 lb. (7.3 kg)	Orange or Black



5-CHANNEL GENERAL PURPOSE ADA

Features Dog Bone Connectors

FEATURES

- Protects cables and hoses up to 1.325" outside dia.
- Dog Bone Connectors to extend to any desired length
- Reinforced hinged lid for easy cable placement
- ADA accessibility ramps built in - no connectors needed
- All-weather polyurethane construction
- Patented 5-bar tread surface for maximum traction



"Dog Bone"
Connector



MODEL: GD5X125-ADA



Protects cables and hoses up to 1.325" outside diameter

Features design that interconnects directly to a 5-channel Guard Dog cable protector without the use of separate connectors!

GUARD DOG® 5-CHANNEL ADA CABLE PROTECTOR has built-in ADA accessibility ramps to provide a safe crossing for vehicle and pedestrian traffic while protecting valuable electrical cables and hose lines. Because the ramps are built-in, there is no need for separate connectors.

Another unique feature of this product is that it interconnects directly to a 5-channel standard ramp Guard Dog cable protector. This modular interlocking design is available in lightweight 18" sections and it includes a recessed carrying handle on the underside of the protector. Ideal for use in amusement parks, entertainment venues, sporting events, and most public, commercial, industrial, construction, and utility applications.


Lid/Base Color Options - Specify after model number



LOAD CAPACITY


Max load tested at 70°F (21°C)

10,500 lb./Tire (4,763 kg)
21,000 lb./Axle (9,526 kg)



End View

*NOTE: Center channel width is 1.6 in. (4.06 cm)



MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
GD5X125-ADA	18 in. (45.7 cm)	50.0 in. (127.0 cm)	1.875 in. (4.76 cm)	1.339 in. (3.4 cm)	1.325 in. (3.37 cm)	21 lb. (9.6 kg)



Guard Dog with ADA Accessibility Ramps in use in an amusement park



Guard Dog with ADA Accessibility Ramps in use at a carnival



3-CHANNEL GENERAL PURPOSE

System features *Dog Bone Connectors*

FEATURES

- Protects cables and hoses up to 2.25" outside dia.
- Dog Bone Connectors to extend to any desired length
- Reinforced hinged lid for easy cable placement
- All-weather polyurethane construction
- Patented 5-bar tread surface for maximum traction
- Modular interlocking design for easy setup



"Dog Bone"
Connector

MODEL: GD3X225

GUARD DOG® 3-CHANNEL CABLE PROTECTOR with hinged lid protects valuable electrical cables and hose lines from damage while providing a safe crossing for vehicle and pedestrian traffic. Modular interlocking design is ideal for use in amusement parks, entertainment venues, sporting events, and most public, commercial, industrial, construction, and utility applications.

Protects cables and hoses up to 2.25" outside diameter

Lid/Base Color Options - Specify after model number



Orange/Black =
O/B





Black/Black =
B/B

LOAD CAPACITY

Max load tested at 70°F (21°C)

14,210 lb./Tire (6,446 kg)
28,420 lb./Axle (12,892 kg)



MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
GD3X225	36 in. (91.4 cm)	20 in. (51.0 cm)	3 in. (7.65 cm)	2.25 in. (5.72 cm)	2.25 in. (5.72 cm)	30 lb. (13.6 kg)

ACCESSIBILITY RAMPS for Guard Dog 3-Channel General Cable Protectors

CHECKERS 3-CHANNEL ACCESSIBILITY RAMPS feature a gradual slope and slip-resistant surface to ensure a safe crossing point for carts, forklifts, vehicles with small wheels and heavy trucks. In addition, each Checkers' ramp system is manufactured to meet ADA and DDA compliant specifications.



ADA/DDA
Compliant



System shown with 2 General Purpose Guard Dogs, 2 pairs of ramps, 8 connectors.


- Patented, modular ADA/DDA Compliant ramps
- Still allows access to cables and cords
- Add ramps when requirements specify
- One person installation - no tools required

LOAD CAPACITY

Max load tested at 70°F (21°C)

20,150 lb./Tire (9,140 kg)
40,300 lb./Axle (18,280 kg)

RAMPS - CPRP-GD3

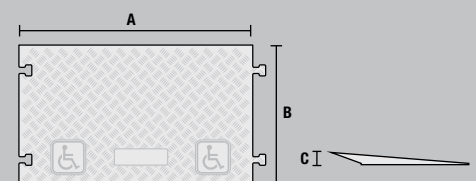

MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	WEIGHT	COLOR
CPRP-GD3	36 in. (91.4 cm)	34.81 in. (88.42 cm)	2.88 in. (7.32 cm)	66 lb. (30 kg) (PAIR OF RAMPS)	Blue



LOW PROFILE GENERAL PURPOSE

System features Dog Bone Connectors

FEATURES

- Protects cables and hoses up to .75" outside dia.
- Dog Bone Connectors to extend to any desired length
- Reinforced hinged lid for easy cable placement
- Available with or without ADA/DDA Accessibility Ramps
- Patented 5-bar tread surface for maximum traction
- Modular interlocking design for easy setup

GUARD DOG LOW PROFILE models are the most compact top-loading cable protectors on the market. These protectors provide a safe and easy crossing for vehicle and pedestrian traffic, while still maintaining a high load-bearing capacity for heavy equipment. The Low Profile models are available with your choice of standard or ADA/DDA compliant ramps.

Lid/Base Color Options - Specify after model number




Orange/Black = O/B




Black/Black = B/B

TOP VIEW WITH STANDARD RAMP




TOP VIEW WITH ADA RAMP



LOW PROFILE 5-CHANNEL



"Dog Bone" Connector



*Note: Center channel width is 1.58 in. (4.01 cm)



STANDARD LOAD CAPACITY

Max load tested at 70°F (21°C)

24,000 lb./Tire (10,886 kg)
48,000 lb./Axle (21,772 kg)

ADA/DDA LOAD CAPACITY

Max load tested at 70°F (21°C)

34,000 lb./Tire (15,422 kg)
68,000 lb./Axle (30,844 kg)

STANDARD RAMP




ADA/DDA RAMP

MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
GD5X75-ST	36 in. (91.44 cm)	16.9 in. (43.0 cm)	1.25 in. (3.18 cm)	1.28 in. (3.25 cm)	.75 in. (1.9 cm)	14.75 lb. (6.69 kg)
GD5X75	36 in. (91.44 cm)	33.3 in. (84.6 cm)	1.25 in. (3.18 cm)	1.28 in. (3.25 cm)	.75 in. (1.9 cm)	24.5 lb. (11.11 kg)

LOW PROFILE 3-CHANNEL



"Dog Bone" Connector



*Note: Center channel width is 2 in. (5.08 cm)



STANDARD LOAD CAPACITY

Max load tested at 70°F (21°C)

17,000 lb./Tire (7,711 kg)
34,000 lb./Axle (15,422 kg)

ADA/DDA LOAD CAPACITY

Max load tested at 70°F (21°C)

27,000 lb./Tire (12,246 kg)
54,000 lb./Axle (24,492 kg)

STANDARD RAMP




ADA/DDA RAMP

MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
GD3X75-ST	36 in. (91.44 cm)	13.8 in. (35.07 cm)	1.25 in. (3.18 cm)	1.25 in. (3.25 cm)	.75 in. (1.9 cm)	12.2 lb. (5.53 kg)
GD3X75	36 in. (91.44 cm)	30.3 in. (76.98 cm)	1.25 in. (3.18 cm)	1.25 in. (3.25 cm)	.75 in. (1.9 cm)	23.4 lb. (10.61 kg)

LOW PROFILE 2-CHANNEL



"Dog Bone"
Connector



STANDARD RAMPS



ADA/DDA RAMPS

MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
GD2X75-ST	36 in. (91.44 cm)	11.94 in. (30.3 cm)	1.25 in. (3.18 cm)	1.5 in. (3.8 cm)	.75 in. (1.9 cm)	9.05 lb. (4.1 kg)
GD2X75	36 in. (91.44 cm)	28.38 in. (72.09 cm)	1.25 in. (3.18 cm)	1.5 in. (3.8 cm)	.75 in. (1.9 cm)	22.85 lb. (10.36 kg)



STANDARD LOAD CAPACITY

Max load tested at 70°F (21°C)

13,000 lb./Tire (5,896 kg)
26,000 lb./Axle (11,792 kg)

ADA/DDA LOAD CAPACITY


Max load tested at 70°F (21°C)

23,000 lb./Tire (10,432 kg)
46,000 lb./Axle (20,864 kg)

LOW PROFILE 1-CHANNEL



"Dog Bone"
Connector



STANDARD RAMPS



ADA/DDA RAMPS

MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
GD1X75-ST	36 in. (91.44 cm)	10.81 in. (27.46 cm)	1.25 in. (3.18 cm)	2.25 in. (5.72 cm)	.75 in. (1.9 cm)	7.8 lb. (3.54 kg)
GD1X75	36 in. (91.44 cm)	27.25 in. (69.22 cm)	1.25 in. (3.18 cm)	2.25 in. (5.72 cm)	.75 in. (1.9 cm)	21.1 lb. (9.55 kg)



STANDARD LOAD CAPACITY

Max load tested at 70°F (21°C)

13,000 lb./Tire (5,896 kg)
26,000 lb./Axle (11,792 kg)

ADA/DDA LOAD CAPACITY

Max load tested at 70°F (21°C)

23,000 lb./Tire (10,432 kg)
46,000 lb./Axle (20,864 kg)

ANTI-SLIP TRACTION KITS for Guard Dog Low Profile Standard Ramp Models

MODEL	DESCRIPTION	WEIGHT
CPRPKIT.75-20	Anti-Slip Rubber Pad Kit for all Guard Dog Low Profile Protectors with Standard Ramps (includes 20 anti-slip rubber pads)	.11 lb. (.05 kg)
CPGLUE	½ oz. Bottle of Checkers' Clear Super Glue (best if kept refrigerated). Use for permanent application of Anti-Slip Rubber Pads	.07 lb. (.032 kg)
CPCARPETKIT-3	Carpet Kit with VELCRO® Brand Fasteners for all Guard Dog Low Profile Protectors with Standard Ramps (includes two 37" x .25" Black Traction Strips and a ½ oz. Bottle of Checkers' Clear Super Glue)	.09 lb. (.041 kg)





3-CHANNEL GENERAL PURPOSE DROP-OVERS

System features Dog Bone Connectors


FEATURES

- Protects cables and hoses up to 1.325" outside dia.
- Dog Bone Connectors to extend to any desired length
- Fast install with drop-over design
- All-weather polyurethane construction
- Patented 5-bar tread surface for maximum traction
- Connects to standard Guard Dog 5-channel



"Dog Bone"
Connector

Protects cables and
hoses up to 1.325"
outside diameter

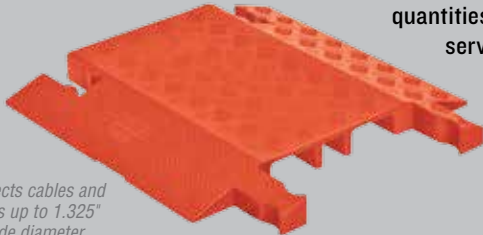

MODEL: GD3-D0



Features design that interconnects directly to a
5-channel Guard Dog cable protector!

GUARD DOG® 3-CHANNEL DROP-OVERS protect pipes, conduit, cable and hose lines that are permanently installed or mounted to the ground or floor. Drop-Overs protect from above but do not prevent abrasion from below and should be used on a flat surface only. Ideal for providing a safe crossing for vehicles and pedestrian traffic in public, commercial and industrial applications. This 3-Channel Drop Over System features two extra wide channels to accommodate various quantities and sizes of lines. These lightweight, 18" length Drop Overs are easy to store in service/utility trucks and use when needed.

Color Options - Specify after model number



Orange
= O



Black
= B




Yellow
= Y

LOAD CAPACITY


Max load tested at 70°F (21°C)

10,500 lb./Tire (4,763 kg)

21,000 lb./Axle (9,526 kg)



End View



MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
GD3-D0	18 in. (45.72 cm)	19.75 in. (50.36 cm)	1.87 in. (4.76 cm)	D2: 3.2 in. (8.16 cm) D: 1.65 in. (4.21 cm)	1.325 in. (3.37 cm)	9 lb. (4.2 kg)




ACCESSIBILITY RAMPS & RAILS for Guard Dog 3-Channel General Purpose Drop-Overs

CHECKERS 3-CHANNEL ACCESSIBILITY RAMPS AND RAILS feature a gradual slope and slip-resistant surface in order to ensure a safe crossing point for carts, forklifts, vehicles with small wheels and heavy trucks. In addition, each Checkers' ramp and rail system is manufactured to meet ADA and DDA compliant specifications.



ADA/DDA
Compliant

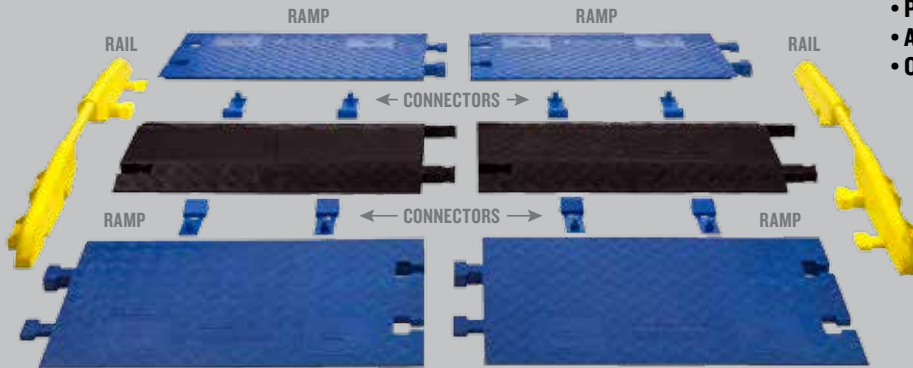

System shown with 4 General Purpose Guard Dog Drop Overs, 2 pairs of ramps, 8 connectors and 2 rails.

Ramps available only in blue and rails available only in yellow.

- Patented, modular ADA/DDA Compliant ramps
- Add ramps and rails when requirements specify
- One person installation - no tools required


LOAD CAPACITY

Max load tested at 70°F (21°C)


20,150 lb./Tire (9,140kg)

40,300 lb./Axle (18,280 kg)

RAMPS - CPRP-3GD-DO

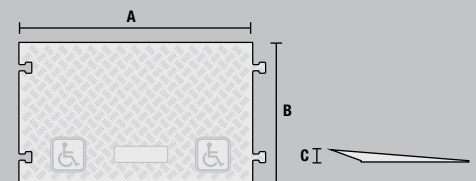

RAILS - CPRL-3GD-DO



	MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	WEIGHT	COLOR
RAMPS	CPRP-3GD-DO	36 in. (91.44 cm) (SINGLE RAMP)	21.88 in. (55.58 cm) (SINGLE RAMP)	2 in. (5.08 cm)	40 lb. (18.1 kg) (PAIR OF RAMPS)	Blue
RAIL	CPRL-3GD-DO	2 in. (5.08 cm)	54 in. (137.16 cm)	2 in. (5.08 cm)	12.7 lb. (5.8 kg)	Yellow



Guard Dog with ADA Accessibility Ramps in use at a racing venue



Guard Dog with ADA Accessibility Ramps and Protector Bridges in use at a field event

CABLE PROTECTOR TRANSPORT CARTS

The perfect solution for easy transport and storage

CHECKER® CABLE PROTECTOR TRANSPORT CARTS are four wheel carts that allow one person to easily transport or store multiple GUARD DOG® Cable Protectors, LINEBACKER® Cable Protectors, or YELLOW JACKET® Cable Protectors at one time. Carts speed up installations and provide safe, organized storage. These sturdy carts are constructed of rugged, tubular steel with a durable black powder-coat paint finish and are very easy to maneuver.

- Two each 8" solid rubber rear wheels
- Two each 5" molded-on rubber, swivelling front casters with wheel locks

CART CAPACITY

Four Wheel Standard Cart with Front Wheel Locks for transporting or storing:

- Linebacker CP5X125 (7 per cart)
- Linebacker CP4X125 (7 per cart)
- Linebacker CP3X225 (6 per cart)
- Linebacker CP5X125-GP (10 per cart)
- Guard Dog GD5X125 (10 per cart)
- Yellow Jacket YJ5X-125 (10 per cart)

FEATURES


- Easy and convenient way to transport or store multiple cable protectors
- Rugged, tubular steel frame construction
- Durable black powder-coat paint finish
- Includes front wheel locks
- Transport or store up to 10 cable protectors



MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	WEIGHT
CT4W-ST	32 in. (81.3 cm)	19 in. (48.3 cm)	42 in. (106.7 cm)	39 lbs. (17.7 kg)



Yellow Jackets in use at the Navel Academy graduation

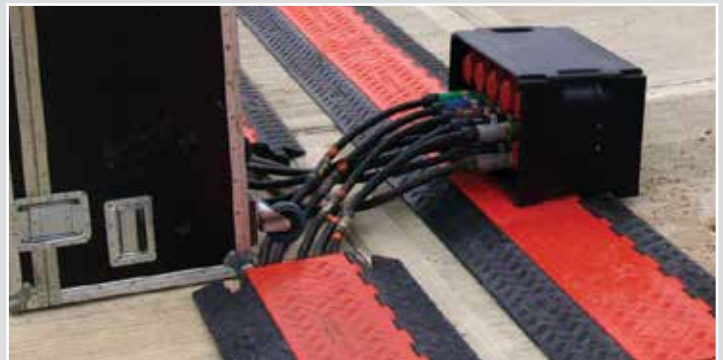

Guard Dogs in use at Silverston Speedway



Linebackers in use at a US Army camp




LIGHTWEIGHT DROP-OVER PROTECTORS

System features L-Connectors

FEATURES

- Protects cables and hoses up to 1.0" outside dia.
- Patented L-Connectors to extend to any length
- For lightweight vehicles and pedestrian traffic
- Patented 5-bar tread surface for maximum traction
- Universal safety colors (UV stabilized)
- Modular interlocking design for easy setup

FASTLANE® LIGHTWEIGHT DROP-OVER PROTECTORS are made from durable polyurethane and feature heavy duty, patented L-Connectors for easily attaching additional protectors to extend to any desired length. Patented 5-bar tread plate surface provides maximum traction for carts and pedestrian traffic. These low profile protectors fit multiple cable sizes and are compact for easy setup, disassembly, and storage.

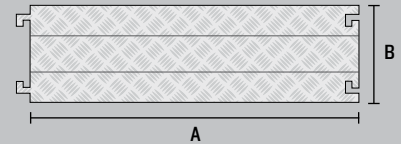


1-CHANNEL OPTIONS



L-Connector

Drop Over
MODEL: FL1X1.5

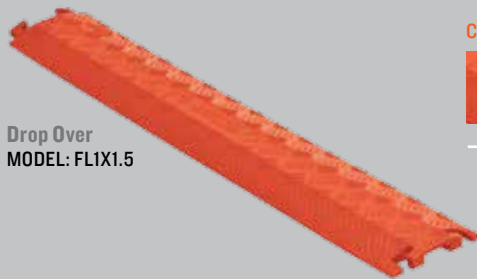

COLOR OPTIONS - SPECIFY COLOR AFTER MODEL NUMBER



Orange =
O



Black =
B




Yellow =
Y

LOAD CAPACITY

Max load tested at 70°F (21°C)

1,050 lb./Tire (477 kg)
2,100 lb./Axle (954 kg)

End View



	MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
1.5 INCH CHANNEL	FL1X1.5	36 in. (91.44 cm)	5.25 in. (13.33 cm)	.75 in. (1.9 cm)	1.5 in. (3.81 cm)	.5 in. (1.27 cm)	3 lb. (1.4 kg)
4 INCH CHANNEL	FL1X4	36 in. (91.44 cm)	10.75 in. (27.3 cm)	1.5 in. (3.81 cm)	4 in. (10.16 cm)	1 in. (2.54 cm)	8 lb. (3.6 kg)

2-CHANNEL OPTION



L-Connector

Drop Over
MODEL: FL2X1.75



COLOR OPTIONS - SPECIFY COLOR AFTER MODEL NUMBER



Orange =
O



Black =
B




Yellow =
Y

LOAD CAPACITY

Max load tested at 70°F (21°C)

1,050 lb./Tire (477 kg)
2,100 lb./Axle (954 kg)


End View



	MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
	FL2X1.75	36 in. (91.44 cm)	10.75 in. (27.3 cm)	1.5 in. (3.81 cm)	1.75 in. (4.45 cm)	1 in. (2.54 cm)	9 lb. (4.2 kg)

ANTI-SLIP TRACTION KITS for FastLane Lightweight Drop-Over Cable Protectors

MODEL	DESCRIPTION	WEIGHT
CPRPKIT.75-18	Anti-Slip Rubber Pad Kit (includes 18 rubber pads) for FL1X1.5	.11 lb. (.05 kg)
CPRPKIT1-8	Anti-Slip Rubber Pad Kit (includes 8 rubber pads) for FL1X4 or FL2X1.75	.13 lb. (.06 kg)
CPGLUE	1/2 oz. Bottle of Checkers' Clear Super Glue (best if kept refrigerated). Use for permanent application of Anti-Slip Rubber Pads	.07 lb. (.032 kg)
CPCARPET-KIT-3	Carpet Kit with VELCRO® Brand Fasteners for all Light Duty Drop Over Models (includes two 37" x .25" Black Traction Strips and a 1/2 oz. Bottle of Checkers' Clear Super Glue)	.09 lb. (.041 kg)

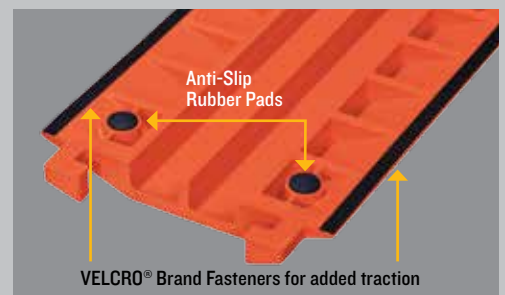

RUBBER DUCT PROTECTORS

Made with industrial-grade rubber

FEATURES

- Reduces tripping hazards
- Protects and organizes portable cords and cables
- Non-metallic, industrial-grade rubber construction
- Multiple sizes for various cable diameters
- Grooved underside for better traction
- Optional Connector Kit available for most sizes

CHECKERS® RUBBER DUCT SYSTEMS protect and hide valuable cords and cables located in walkways or work areas. These non-metallic, flexible, industrial-grade rubber protectors are extremely durable, easy to install, and organize portable cords and cables while reducing trip hazards. Fits multiple cable sizes. Available in 5' or 10' lengths and can be slit on the bottom for easy cord insertion. CHECKERS® Rubber Duct protectors feature grooved underside for better traction. Optional Carpet Kit with VELCRO® Brand Fasteners also available for added traction.

MODEL	DESCRIPTION	WEIGHT
CPCARPETKIT-5	Carpet Kit with VELCRO® Brand Fasteners for 5 ft. Rubber Duct Protectors (includes two 61" x .25" Black Traction Strips and a 1/2 oz. Bottle of Checkers' Clear Super Glue)	.09 lb. (.041 kg)
CPCARPETKIT-10	Carpet Kit with VELCRO® Brand Fasteners for 10 ft. Rubber Duct Protectors (includes two 121" x .25" Black Traction Strips and a 1/2 oz. Bottle of Checkers' Clear Super Glue)	.12 lb. (.054 kg)

OPTIONAL CONNECTOR KIT



OPTIONAL CARPET KIT




RFD1



MODEL: RFD1-10

- Single channel protector for a phone line or small 14 through 22 gauge wire
- Can be slit if necessary (supplied unslit)




MODEL	DESCRIPTION	COLOR	WEIGHT PER LENGTH
RFD1-10	10 ft. Length	Black	4.60 lb. (2.1 kg)

RFD2



MODEL: RFD2-10

- Two-channel protector multiple communication lines or 14 through 22 gauge wire
- Can be slit if necessary (supplied unslit)




MODEL	DESCRIPTION	COLOR	WEIGHT PER LENGTH
RFD2-10	10 ft. Length	Black	3.70 lb. (1.7 kg)

RFD3




MODEL: RFD3-10

- Center channel sized to fit standard power cords and CAT5 cable
- Protector must be slit for standard power cords due to size of plug connectors (supplied unslit)




MODEL	DESCRIPTION	COLOR	WEIGHT PER LENGTH
RFD3-10	10 ft. Length	Black	6.85 lb. (3.2 kg)

RFD4



MODEL: RFD4-10

- Large channel size can accommodate multiple cables and some power plug connectors
- Can be slit if necessary (supplied unslit)

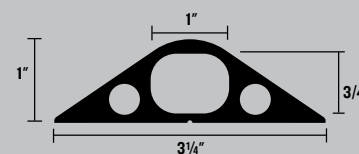


MODEL	DESCRIPTION	COLOR	WEIGHT PER LENGTH
RFD4-10	10 ft. Length	Black	9.3 lb. (4.3 kg)
RFD4CN-3/8	Optional Connector Kit (Includes two connectors)		

RFD5




- Three-channel protector for multiple cable applications
- Can be slit if necessary (supplied unslit)




MODEL	DESCRIPTION	COLOR	WEIGHT PER LENGTH
RFD5-5	5 ft. Length	Black	6.20 lb. (2.8 kg)
RFD5-10	10 ft. Length	Black	12.40 lb. (5.7 kg)
RFDCN-3/8	Optional Connector Kit (Includes two connectors)		

RFD6



- Large two-channel protector ideal for most multiple cable applications
- Can be slit if necessary (supplied unslit)

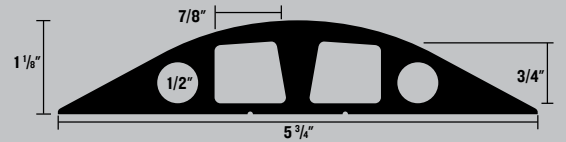


MODEL	DESCRIPTION	COLOR	WEIGHT PER LENGTH
RFD6-5	5 ft. Length	Black	9.15 lb. (4.2 kg)
RFD6-10	10 ft. Length	Black	18.30 lb. (8.4 kg)
RFDCN-1/2	Optional Connector Kit (Includes two connectors)		

RFD7



- Heavy duty single channel protector for cable and hose lines up to 1" diameter
- Slit at bottom

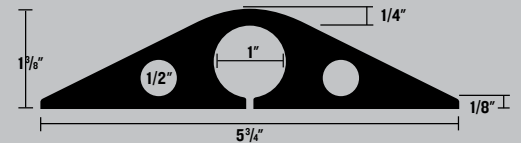


MODEL	DESCRIPTION	COLOR	WEIGHT PER LENGTH
RFD7-5	5 ft. Length	Black	11.4 lb. (5.2 kg)
RFDCN-1/2	Optional Connector Kit (Includes two connectors)		

RFD8



- Heavy duty single channel protector for cable and hose lines up to 1.25" diameter
- Slit at bottom

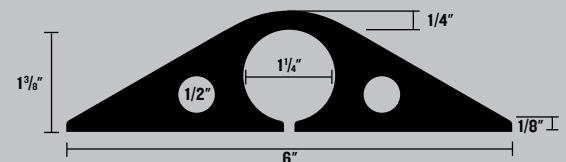


MODEL	DESCRIPTION	COLOR	WEIGHT PER LENGTH
RFD8-5	5 ft. Length	Black	14.6 lb. (6.7 kg)
RFDCN-1/2	Optional Connector Kit (Includes two connectors)		

RFD9



- Heavy duty single channel protector for cable and hose lines up to 1.5" diameter
- Slit at bottom

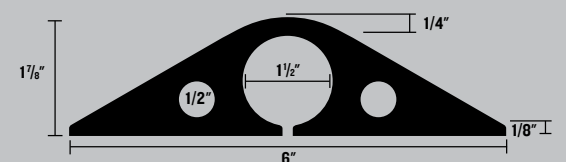

MODEL	DESCRIPTION	COLOR	WEIGHT PER LENGTH
RFD9-5	5 ft. Length	Black	15.33 lb. (7.0 kg)
RFDCN-1/2	Optional Connector Kit (Includes two connectors)		

EXTREME CROSSOVER SYSTEMS

For heavy duty mining and construction sites

FEATURES

- Protects cables & hoses in mining and construction
- Made from durable urethane that withstands over a million pounds gross vehicle weight
- Impact and abrasion resistant to trucks and falling rock
- Eliminates cost of trenching or rerouting cables
- Protects cables and hoses up to 5.5" outside dia.

CHECKERS® EXTREME CROSSOVER PADS provide protection for electrical cables used in mining and construction. Durable urethane construction withstands thousands of pounds of weight and endures constant pounding, impact and abrasion caused by haul trucks and falling rocks. Extensively tested and proven to be oil, chemical, abrasion, cut/tear and temperature resistant. Types 3 and 4 feature molded-in through-holes for tow chain attachment (chain not included). Type 5 includes heavy duty chain handle on each side. Crossover sections can be fastened together for any length required. The use of crossover pads greatly improves safety and eliminates the cost and labor of burying, rerouting, or stringing cables overhead. Custom lengths available up to 38'.


TYPE 1 and 2: Feature molded-in hand holds for ease of placement.

TYPE 3 and 4: Feature two molded-through 1-inch holes for fastening together multiple pad sections using wire rope. Closure strips **MUST BE ORDERED SEPARATELY**.

TYPE 5: Feature steel framework throughout and molded-in chains at both ends for moving. Closure strip **INCLUDED**.


NOTE: Please make your product selection carefully. Extreme Crossover Systems are non-returnable.

End Views



240-ton haul truck drives over an Extreme Crossover Pad

Top View

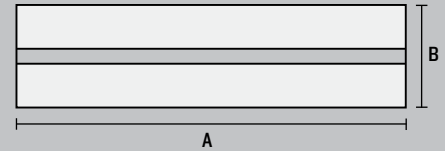

MODEL	DESCRIPTION	A: LENGTH	B: WIDTH	C: HEIGHT	D: STEP HEIGHT	E: SLOT SIZE	COLOR	WEIGHT
X0118-2	Type 1	24 in. (61.0 cm)	18 in. (45.7 cm)	4.5 in. (11.4 cm)	1 in. (2.5 cm)	2.5 in. (6.4 cm)	Orange	37 lb. (16.8 kg)
X0218-2	Type 2	24 in. (61.0 cm)	18 in. (45.7 cm)	4.5 in. (11.4 cm)	1 in. (2.5 cm)	3.0 in. (7.6 cm)	Orange	37 lb. (16.8 kg)
X0342-10	Type 3	120 in. (304.8 cm)	42 in. (106.7 cm)	7 in. (17.8 cm)	.75 in. (1.9 cm)	3.5 in. (8.9 cm)	Orange	852 lb. (386.5 kg)
X0342-CS-10	Closure Strip	120 in. (304.8 cm)	3.43 in. (8.7 cm)	3.3 in. (8.4 cm)	N/A	N/A	Orange	50 lb. (22.7 kg)
X0436-8	Type 4	96 in. (243.8 cm)	36 in. (91.4 cm)	5 in. (12.7 cm)	.75 in. (1.9 cm)	3.25 in. (8.3 cm)	Orange	415 lb. (188.2 kg)
X0436-CS-8	Closure Strip	96 in. (243.8 cm)	3.25 in. (8.3 cm)	3.375 in. (8.6 cm)	N/A	N/A	Orange	44 lb. (20 kg)
X0436-10	Type 4	120 in. (304.8 cm)	36 in. (91.4 cm)	5 in. (12.7 cm)	.75 in. (1.9 cm)	3.25 in. (8.3 cm)	Orange	518 lb. (235 kg)
X0436-CS-10	Closure Strip	120 in. (304.8 cm)	3.25 in. (8.3 cm)	3.375 in. (8.6 cm)	N/A	N/A	Orange	55 lb. (25 kg)
X0442-8	Type 4	96 in. (243.8 cm)	42 in. (106.7 cm)	7 in. (17.8 cm)	.75 in. (1.9 cm)	4.5 in. (11.4 cm)	Orange	610 lb. (277 kg)
X0442-CS-8	Closure Strip	96 in. (243.8 cm)	4.5 in. (11.4 cm)	5.375 in. (13.7 cm)	N/A	N/A	Orange	84 lb. (38.2 kg)
X0442-10	Type 4	120 in. (304.8 cm)	42 in. (106.7 cm)	7 in. (17.8 cm)	.75 in. (1.9 cm)	4.5 in. (11.4 cm)	Orange	762 lb. (346 kg)
X0442-10	Closure Strip	120 in. (304.8 cm)	4.5 in. (11.4 cm)	5.375 in. (13.7 cm)	N/A	N/A	Orange	105 lb. (47.6 kg)
X042-3-L10-B	Type 5	120 in. (304.8 cm)	41.25 in. (104.8 cm)	5.75 in. (14.6 cm)	1.25 in. (3.2 cm)	3.5 in. (8.9 cm)	Orange or Black	2,800 lb. (1270 kg)
X042-3-L20-B	Type 5	240 in. (609.6 cm)	41.25 in. (104.8 cm)	5.75 in. (14.6 cm)	1.25 in. (3.2 cm)	3.5 in. (8.9 cm)	Orange or Black	4,400 lb. (1996 kg)
X042-3-L38-B	Type 5	456 in. (1158.2 cm)	41.25 in. (104.8 cm)	5.75 in. (14.6 cm)	1.25 in. (3.2 cm)	3.5 in. (8.9 cm)	Orange or Black	7,350 lb. (3334 kg)
X042-4-L10-B	Type 5	120 in. (304.8 cm)	41.25 in. (104.8 cm)	6.75 in. (17.1 cm)	2.3 in. (5.9 cm)	4.5 in. (11.4 cm)	Orange or Black	3,150 lb. (1429 kg)
X042-4-L20-B	Type 5	240 in. (604.6 cm)	41.25 in. (104.8 cm)	6.75 in. (17.1 cm)	2.3 in. (5.9 cm)	4.5 in. (11.4 cm)	Orange or Black	5,150 lb. (2336 kg)
X042-4-L38-B	Type 5	456 in. (1158.2 cm)	41.25 in. (104.8 cm)	6.75 in. (17.1 cm)	2.3 in. (5.9 cm)	4.5 in. (11.4 cm)	Orange or Black	8,750 lb. (3969 kg)
X042-5-L10-B	Type 5	120 in. (304.8 cm)	41.25 in. (104.8 cm)	7.75 in. (19.7 cm)	3.25 in. (8.3 cm)	5.5 in. (14.0 cm)	Orange or Black	3,500 lb. (1588 kg)
X042-5-L20-B	Type 5	240 in. (609.6 cm)	41.25 in. (104.8 cm)	7.75 in. (19.7 cm)	3.25 in. (8.3 cm)	5.5 in. (14.0 cm)	Orange or Black	5,850 lb. (2654 kg)
X042-5-L38-B	Type 5	456 in. (1158.2 cm)	41.25 in. (104.8 cm)	7.75 in. (19.7 cm)	3.25 in. (8.3 cm)	5.5 in. (14.0 cm)	Orange or Black	10,050 lb. (4559 kg)

WARNING: Crossover pads are for rubber-tired vehicles only and are not for equipment with metal tracks.


UTILITY CROSSOVER SYSTEMS

For maintenance operations or quick use applications

FEATURES

- Polyurethane construction
- Convenient carrying handles
- Replaceable rubber traction pads
- Two tunnel sizes available
- Lightweight and portable
- Load capacity up to 4,000 lb./tire

CHECKERS® UTILITY CROSSOVER SYSTEMS provide protection for valuable cables and hoses, while ensuring a method of safe passage for vehicle traffic. These lightweight and portable crossovers are manufactured from durable polyurethane and are ideal during maintenance operations or in emergency situations. Complete with carrying handle for easy positioning. Two tunnel sizes available.

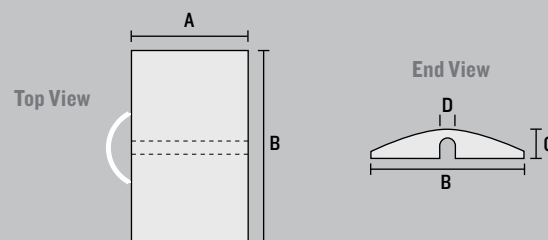

MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: TUNNEL SIZE	WEIGHT
COP2200-3	18 in. (45.7 cm)	30 in. (76.2 cm)	5 in. (12.7 cm)	3 in. (7.6 cm)	35 lb. (15.9 kg)
COP2200-4.5	18 in. (45.7 cm)	30 in. (76.2 cm)	6 in. (15.2 cm)	4.5 in. (11.4 cm)	35 lb. (15.9 kg)



400-ton haul truck drives over an Extreme Crossover Pad



LARGE HOSE BRIDGE SYSTEMS

System features modular interlocking sections

FEATURES

- Protect large lines up to 6.5" outside diameter
- High density polyurethane construction
- Single or multiple tunnel systems available
- Multiple sizes for various hose & cable diameters
- Reduces maintenance and replacement costs
- Modular interlocking design for easy setup

DIAMONDBACK® HOSE BRIDGE SYSTEMS provide protection for valuable cable and hose lines while ensuring a method of safe passage for vehicles. They replace wooden and metal fabricated ramps and can be used to protect lines up to 6.5 inches in diameter. High density, all-weather polyurethane construction protects from damage by physical pressure and reduces cable and hose maintenance and replacement costs. The lightweight, modular design of interlocking 16 inch wide sections provides multi-length flexibility. DIAMONDBACK® HOSE BRIDGE SYSTEMS are intended for temporary installations only.

LOAD CAPACITY


MODEL	Max Load Per Tire
UHB2025	23,700 lb. (10,750 kg)
UHB3035	19,800 lb. (8,981 kg)
UHB4045	19,300 lb. (8,754 kg)
UHB5060	17,100 lb. (7,757 kg)

- Polyurethane construction is abrasion, impact and weather resistant with high load-bearing capacity
- Multiple tunnel sizes to accommodate fully charged hose lines and cables of various diameters
- Diamond-plate tread surface increases traction
- Yellow caution color for high visibility
- Modular interlocking design is lightweight, easy to transport, setup, disassemble, and store
- Built-in hand holds allow for handling with ease and double as attachment points for mounting brackets


WARNING: Vehicles crossing bridge system must have clearance of greater than bridge height.

WARNING: Hose Bridges are for rubber tired vehicles only (not for equipment with metal tracks)


End View: Unassembled Components

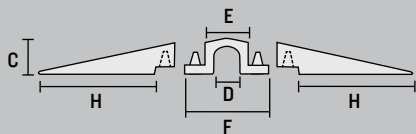

Top View: Unassembled Components

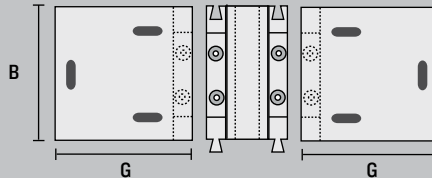

Top View: Assembled



Each Single Tunnel Modular Bridge System consists of 1 Tunnel and 2 Ramps




	MODEL	DESCRIPTION	A: BRIDGE LENGTH	B: BRIDGE WIDTH	C: BRIDGE HEIGHT	D: TUNNEL DIAMETER	E: TUNNEL TOP LENGTH	F: TUNNEL BASE LENGTH	G: RAMP TOP LENGTH	H: RAMP BASE LENGTH	SYSTEM WEIGHT
3" TUNNEL	UHB2025	Bridge for up to 3 in. lines	34.75 in. (88.7 cm)	16 in. (40.6 cm)	3.88 in. (9.9 cm)	3 in. (7.62 cm)	5.38 in. (13.9 cm)	13.25 in. (33.8 cm)	14.75 in. (37.7 cm)	10.75 in. (27.5 cm)	32 lb. (14.5 kg)
3.5" TUNNEL	UHB3035	Bridge for up to 3.5 in. lines	38.25 in. (97.6 cm)	16 in. (40.6 cm)	4.63 in. (11.8 cm)	3.5 in. (8.89 cm)	6.5 in. (16.6 cm)	14.38 in. (36.7 cm)	16 in. (40.8 cm)	12 in. (30.6 cm)	40 lb. (18.1 kg)
4.5" TUNNEL	UHB4045	Bridge for up to 4.5 in. lines	44 in. (111.8 cm)	16 in. (40.6 cm)	5.5 in. (14.1 cm)	4.5 in. (11.43 cm)	7.75 in. (19.8 cm)	15.63 in. (39.9 cm)	18.25 in. (46.6 cm)	14.25 in. (36.4 cm)	50 lb. (22.7 kg)
6.5" TUNNEL	UHB5060	Bridge for up to 6.5 in. lines	60 in. (153.0 cm)	16 in. (40.6 cm)	8.13 in. (20.8 cm)	7 in. (17.9 cm)	9.13 in. (23.3 cm)	18.25 in. (46.6 cm)	25.5 in. (65.1 cm)	20.88 in. (53.3 cm)	92 lb. (41.7 kg)


CUSTOM BRIDGE SYSTEMS

DIAMONDBACK® HOSE BRIDGE SYSTEMS can be customized to any number of tunnels or length. Building a custom system is as easy as ordering tunnels connectors and the individual components separately.

Top View: Two-Tunnel Bridge System

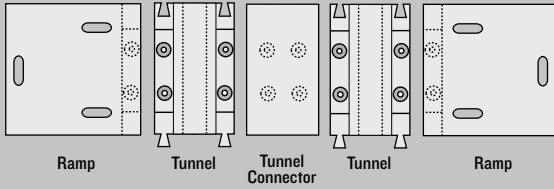

End View: Two-Tunnel Bridge System



End View: Completed Two-Tunnel Bridge System



End View: Three-Tunnel Bridge System



THREE-TUNNEL BRIDGE SYSTEM

LOAD CAPACITY

MODEL	Max Load Per Tire
UHB2025	23,700 lb. (10,750 kg)
UHB3035	19,800 lb. (8,981 kg)
UHB4045	19,300 lb. (8,754 kg)
UHB5060	17,100 lb. (7,757 kg)

CREATE A CUSTOM BRIDGE SYSTEM

3" TUNNEL OPTIONS

	MODEL	DESCRIPTION	WEIGHT	END VIEW
TUNNEL	UHB2025T (Each)	Tunnel only, for up to 3 in. lines	15 lb. (6.8 kg)	
RAMPS	UHB2025R (Pair)	Ramps only, for UHB2025 Tunnel	18 lb. (8.2 kg)	
TUNNEL CONNECTOR	UHB2025TC (Each)	Tunnel Connector only, for UHB2025T Tunnel	11 lb. (5 kg)	

3.5" TUNNEL OPTIONS

	MODEL	DESCRIPTION	WEIGHT	END VIEW
TUNNEL	UHB3035T (Each)	Tunnel only, for up to 3.5 in. lines	17 lb. (7.7 kg)	
RAMPS	UHB3035R (Pair)	Ramps only, for UHB3035 Tunnel	22 lb. (10 kg)	
TUNNEL CONNECTOR	UHB3035TC (Each)	Tunnel Connector only, for UHB3035T Tunnel	16 lb. (7.3 kg)	

4.5" TUNNEL OPTIONS

	MODEL	DESCRIPTION	WEIGHT	END VIEW
TUNNEL	UHB4045T (Each)	Tunnel only, for up to 4.5 in. lines	21 lb. (9.5 kg)	
RAMPS	UHB4045R (Pair)	Ramps only, for UHB4045 Tunnel	30 lb. (13.6 kg)	
TUNNEL CONNECTOR	UHB4045TC (Each)	Tunnel Connector only, for UHB4045T Tunnel	21 lb. (9.5 kg)	

6.5" TUNNEL OPTIONS

	MODEL	DESCRIPTION	WEIGHT	END VIEW
TUNNEL	UHB5060T (Each)	Tunnel only, for up to 6.5 in. lines	32 lb. (6.8 kg)	
RAMPS	UHB5060R (Pair)	Ramps only, for UHB5060 Tunnel	58 lb. (26.3 kg)	
TUNNEL CONNECTOR	UHB5060TC (Each)	Tunnel Connector only, for UHB5060T Tunnel	26 lb. (11.8 kg)	

CHECKERS®

INDUSTRIAL SAFETY PRODUCTS



WE ARE

safety.

The experts in protecting people and assets

www.checkersindustrial.com

Toll free: 800-438-9336
Ph: 720-890-1187 • Fx: 720-890-1191
620 Compton St. • Broomfield, CO 80020

